




OIL ANALYSIS REPORT

Sample Rating Trend

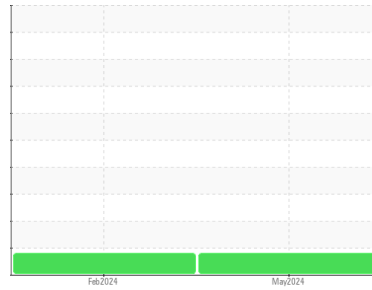

ADDITIVES



Machine Id
INGERSOLL RAND AC-2 RS75N 100HP (S/N MOX1007726)
 Component
Air Compressor
 Fluid
USPI MAX FG AIR 46 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil. The amount and size of particulates present in the system are acceptable.

Fluid Condition

Additive levels indicate the addition of a different brand or type of oil. Confirmed. The AN level is acceptable for this fluid.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		USPM36161	USPM30084	---
Sample Date	Client Info		15 May 2024	13 Feb 2024	---
Machine Age	hrs	Client Info	0	2925	---
Oil Age	hrs	Client Info	0	2925	---
Oil Changed	Client Info		N/A	N/A	---
Sample Status			ATTENTION	ATTENTION	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	0	0	---
Chromium	ppm	ASTM D5185m >4	0	0	---
Nickel	ppm	ASTM D5185m >4	0	<1	---
Titanium	ppm	ASTM D5185m	0	0	---
Silver	ppm	ASTM D5185m	<1	0	---
Aluminum	ppm	ASTM D5185m >10	0	<1	---
Lead	ppm	ASTM D5185m >20	0	0	---
Copper	ppm	ASTM D5185m >40	<1	<1	---
Tin	ppm	ASTM D5185m >5	0	<1	---
Vanadium	ppm	ASTM D5185m	<1	0	---
Cadmium	ppm	ASTM D5185m	0	0	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	0	0	---
Barium	ppm	ASTM D5185m 0	1	<1	---
Molybdenum	ppm	ASTM D5185m 0	0	0	---
Manganese	ppm	ASTM D5185m	0	<1	---
Magnesium	ppm	ASTM D5185m 0	<1	2	---
Calcium	ppm	ASTM D5185m 0	7	14	---
Phosphorus	ppm	ASTM D5185m 0	49	65	---
Zinc	ppm	ASTM D5185m 0	3	0	---
Sulfur	ppm	ASTM D5185m 0	86	104	---

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<1	<1	---
Sodium	ppm	ASTM D5185m	1	2	---
Potassium	ppm	ASTM D5185m >20	<1	3	---
Water	%	ASTM D6304 >0.6	0.010	0.017	---
ppm Water	ppm	ASTM D6304 >6000	101	178	---

FLUID CLEANLINESS






	method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647	>10000	278	5672	---
Particles >6µm	ASTM D7647	>2500	33	1788	---
Particles >14µm	ASTM D7647	>320	5	235	---
Particles >21µm	ASTM D7647	>80	2	66	---
Particles >38µm	ASTM D7647	>20	0	5	---
Particles >71µm	ASTM D7647	>4	0	0	---
Oil Cleanliness	ISO 4406 (c)	>20/18/15	15/12/10	20/18/15	---

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045 0.16	0.24	0.11	---




OIL ANALYSIS REPORT

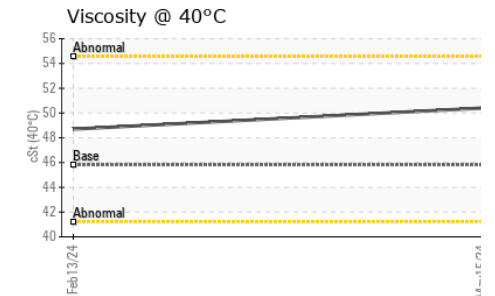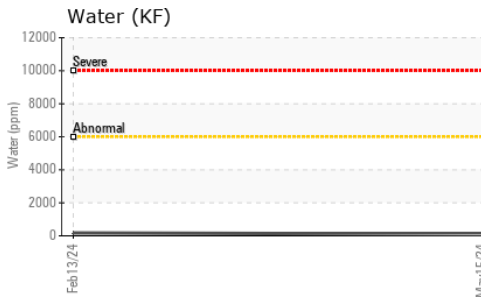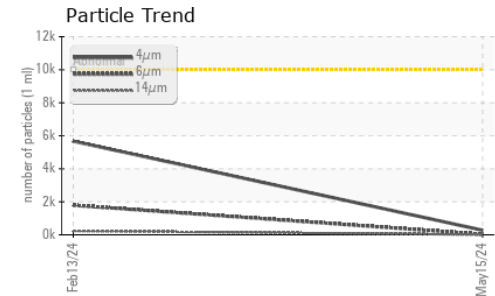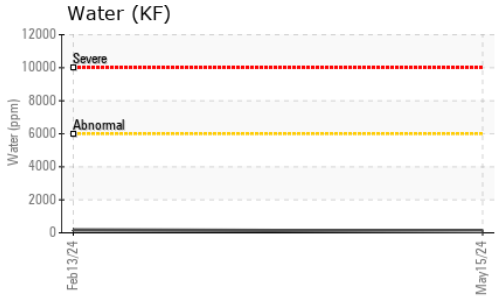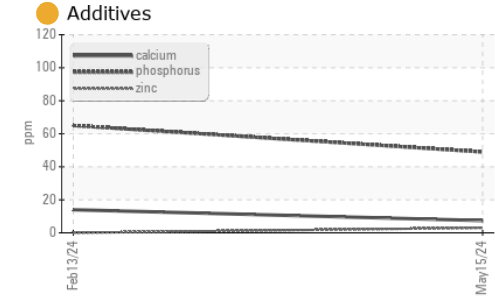






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.6	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	50.4	48.7	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

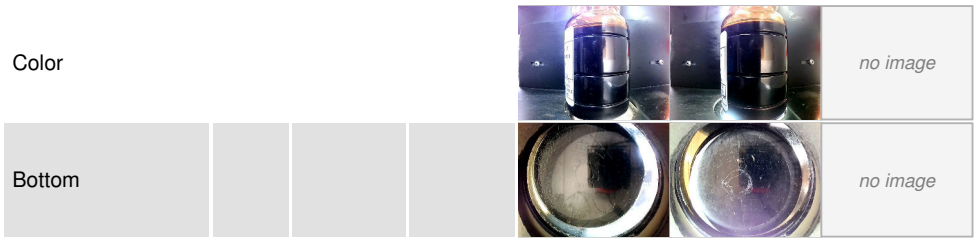

GRAPHS

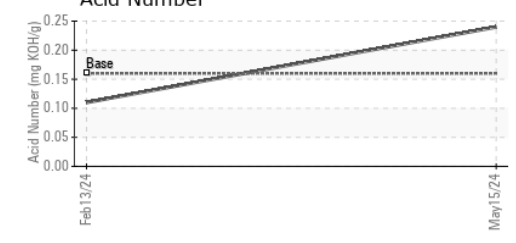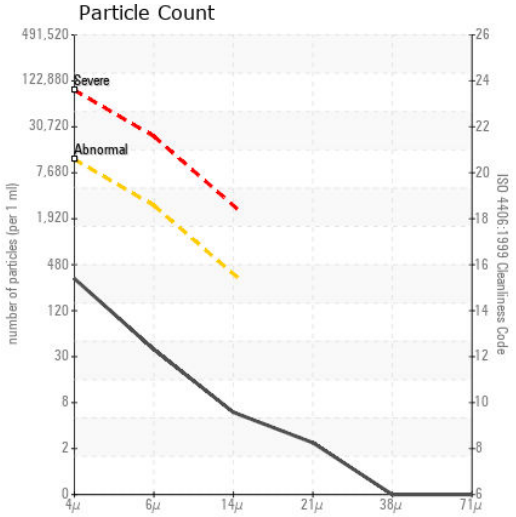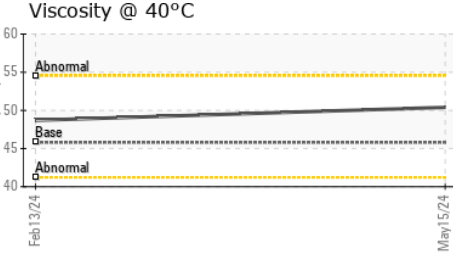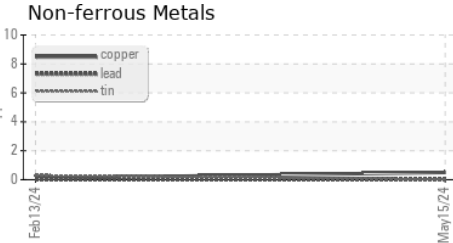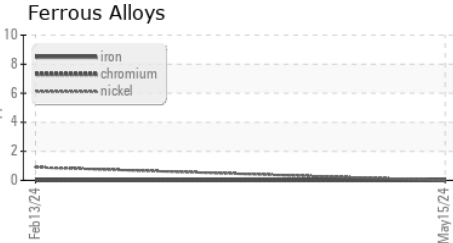

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : USPM36161 **Received** : 16 May 2024
Lab Number : 06181344 **Tested** : 17 May 2024
Unique Number : 11032670 **Diagnosed** : 20 May 2024 - Jonathan Hester
Test Package : IND 2

TYSON - BOWLING GREEN KY
 1388 PRODUCTION AVE
 BOWLING GREEN, KY
 US 42101
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)