

# OIL ANALYSIS REPORT

Area

**AFX-32**


Machine Id

**SULLIVAN PALATEK 20BE000938 - CMS LAND FILL**

Component

**Compressor**

Sample Rating Trend

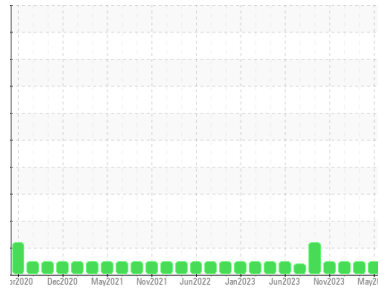

**NORMAL**



**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>UCS06181478</b>	UCS06168602	UCS06103141
Sample Date	Client Info			<b>03 May 2024</b>	05 Apr 2024	06 Feb 2024
Machine Age	hrs	Client Info		<b>36148</b>	35497	34081
Oil Age	hrs	Client Info		<b>6086</b>	2416	4019
Oil Changed	Client Info			<b>Changed</b>	Not Changd	Not Changd
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	NEG	NEG



WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>&lt;1</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>1</b>	0	0
Lead	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	<1	0
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	0	1
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>13</b>	1	10
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Manganese	ppm	ASTM D5185m		<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>&lt;1</b>	0	<1
Calcium	ppm	ASTM D5185m		<b>4</b>	0	0
Phosphorus	ppm	ASTM D5185m	1090	<b>180</b>	169	101
Zinc	ppm	ASTM D5185m		<b>2</b>	0	0
Sulfur	ppm	ASTM D5185m	1700	<b>208</b>	256	195

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>2</b>	<1	<1
Sodium	ppm	ASTM D5185m		<b>25</b>	28	10
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	<1	0

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.28	<b>0.30</b>	0.28	0.38


# OIL ANALYSIS REPORT

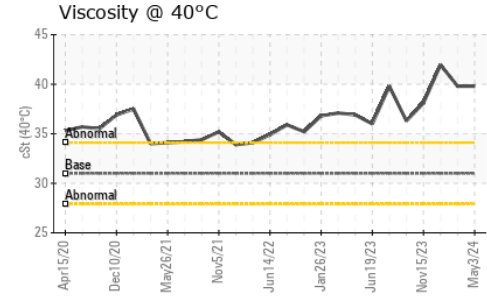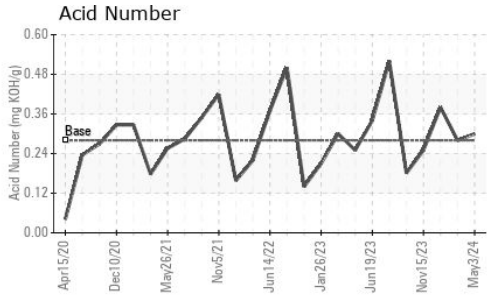





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 31	<b>39.8</b>	39.8	41.96

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

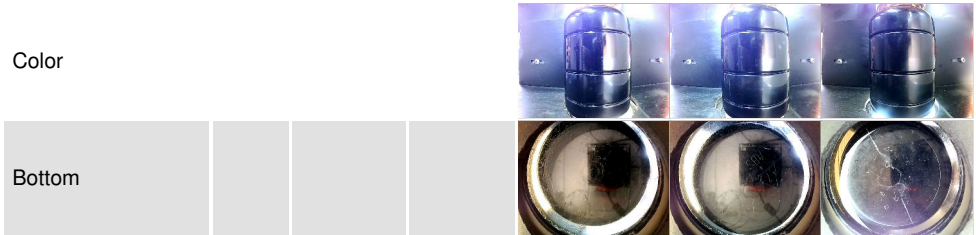

## GRAPHS

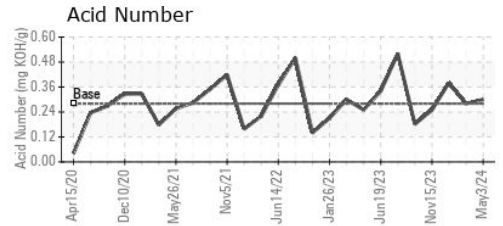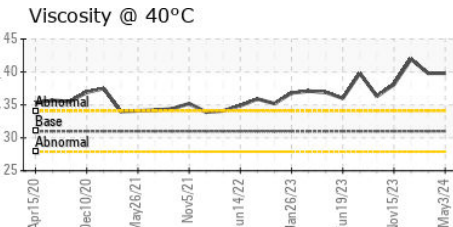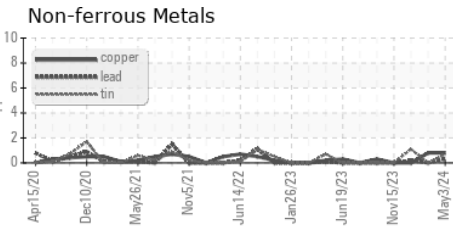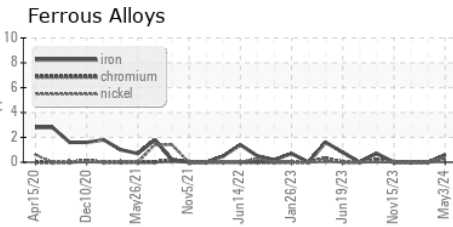

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : UCS06181478      **Received** : 16 May 2024  
**Lab Number** : **06181478**      **Tested** : 17 May 2024  
**Unique Number** : 11032804      **Diagnosed** : 20 May 2024 - Sean Felton  
**Test Package** : IND 2

**STANLEY HEATING & AIR**  
 1002 DOBBINS MILL RD  
 ELKIN, NC  
 US 28621  
 Contact: DARRYL WEDDLE  
 darryl@stanleyvac.com  
 T: (336)366-4226  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)