




OIL ANALYSIS REPORT

Sample Rating Trend

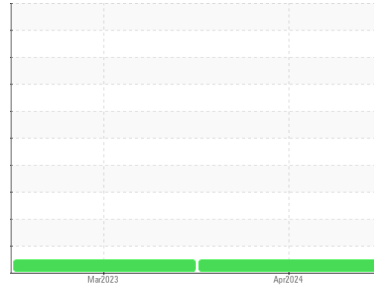

NORMAL



Area
[23092]

Machine Id
80-250

Component
Rear Differential

Fluid
ConocoPhillips powertran oil (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: ConocoPhillips powertran oil)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0836204	WC0793314	---
Sample Date	Client Info			30 Apr 2024	15 Mar 2023	---
Machine Age	hrs	Client Info		1124	488	---
Oil Age	hrs	Client Info		1124	488	---
Oil Changed	Client Info			Changed	Not Changd	---
Sample Status				NORMAL	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	85	32	---
Chromium	ppm	ASTM D5185m	>10	1	<1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		<1	0	---
Aluminum	ppm	ASTM D5185m	>25	1	1	---
Lead	ppm	ASTM D5185m	>25	<1	0	---
Copper	ppm	ASTM D5185m	>100	7	3	---
Tin	ppm	ASTM D5185m	>10	<1	0	---
Vanadium	ppm	ASTM D5185m		<1	0	---
Cadmium	ppm	ASTM D5185m		0	<1	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		133	117	---
Barium	ppm	ASTM D5185m		0	0	---
Molybdenum	ppm	ASTM D5185m		<1	<1	---
Manganese	ppm	ASTM D5185m		6	5	---
Magnesium	ppm	ASTM D5185m		24	15	---
Calcium	ppm	ASTM D5185m		3544	3489	---
Phosphorus	ppm	ASTM D5185m		1241	1131	---
Zinc	ppm	ASTM D5185m		1455	1433	---
Sulfur	ppm	ASTM D5185m		3958	4177	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	13	10	---
Sodium	ppm	ASTM D5185m		12	15	---
Potassium	ppm	ASTM D5185m	>20	4	1	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---



OIL ANALYSIS REPORT

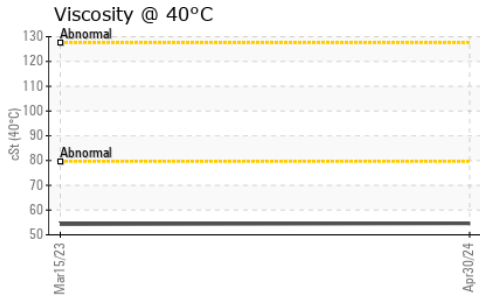




FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445	54.6	54.3	---

SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

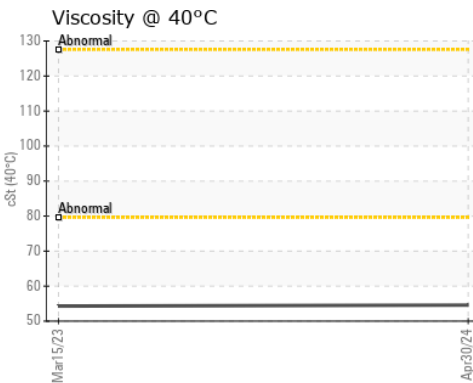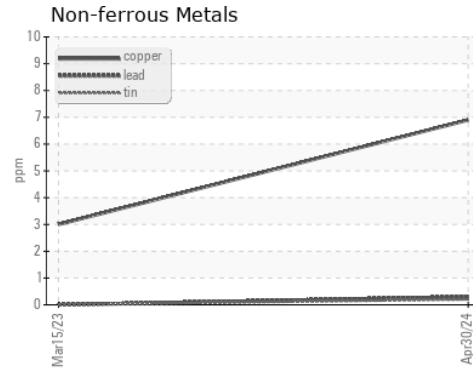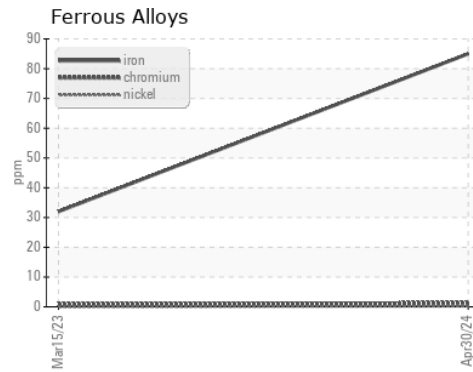

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0836204
Lab Number : 06183556
Unique Number : 11034882
Test Package : CONST

Received : 17 May 2024
Tested : 21 May 2024
Diagnosed : 21 May 2024 - Don Baldrige

MANHATTAN ROAD AND BRIDGE
 5601 S 122ND E AVE
 TULSA, OK
 US 74146

Contact: BEN CALDWELL
 kevin.marson@wearcheck.com
 T: (918)728-5749

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)