



OIL ANALYSIS REPORT

Sample Rating Trend



Machine Id
KAESER 9305560 (S/N 2221)
 Component
Compressor
 Fluid
KAESER SIGMA (OEM) S-460 (--- GAL)

DIAGNOSIS

Recommendation
 The filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear
 All component wear rates are normal.

Contamination
 There is a high amount of particulates present in the oil.

Fluid Condition
 The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

| SAMPLE INFORMATION | method | limit/base | current | history1 | history2 |
|--------------------|-------------|-------------|--------------------|----------|----------|
| Sample Number | Client Info | | KC123260 | --- | --- |
| Sample Date | Client Info | | 01 May 2024 | --- | --- |
| Machine Age | hrs | Client Info | 479 | --- | --- |
| Oil Age | hrs | Client Info | 0 | --- | --- |
| Oil Changed | Client Info | | N/A | --- | --- |
| Sample Status | | | ABNORMAL | --- | --- |

| WEAR METALS | method | limit/base | current | history1 | history2 |
|-------------|--------|-----------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >50 | <1 | --- | --- |
| Chromium | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Nickel | ppm | ASTM D5185m >3 | 0 | --- | --- |
| Titanium | ppm | ASTM D5185m >3 | 0 | --- | --- |
| Silver | ppm | ASTM D5185m >2 | 0 | --- | --- |
| Aluminum | ppm | ASTM D5185m >10 | <1 | --- | --- |
| Lead | ppm | ASTM D5185m >10 | 0 | --- | --- |
| Copper | ppm | ASTM D5185m >50 | 4 | --- | --- |
| Tin | ppm | ASTM D5185m >10 | <1 | --- | --- |
| Vanadium | ppm | ASTM D5185m | 0 | --- | --- |
| Cadmium | ppm | ASTM D5185m | 0 | --- | --- |






| ADDITIVES | method | limit/base | current | history1 | history2 |
|------------|--------|----------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m | 0 | --- | --- |
| Barium | ppm | ASTM D5185m 90 | 26 | --- | --- |
| Molybdenum | ppm | ASTM D5185m | 0 | --- | --- |
| Manganese | ppm | ASTM D5185m | <1 | --- | --- |
| Magnesium | ppm | ASTM D5185m 90 | 66 | --- | --- |
| Calcium | ppm | ASTM D5185m 2 | 2 | --- | --- |
| Phosphorus | ppm | ASTM D5185m | 8 | --- | --- |
| Zinc | ppm | ASTM D5185m | 0 | --- | --- |

| CONTAMINANTS | method | limit/base | current | history1 | history2 |
|--------------|--------|------------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | <1 | --- | --- |
| Sodium | ppm | ASTM D5185m | 15 | --- | --- |
| Potassium | ppm | ASTM D5185m >20 | 7 | --- | --- |
| Water | % | ASTM D6304 >0.05 | 0.023 | --- | --- |
| ppm Water | ppm | ASTM D6304 >500 | 234 | --- | --- |

| FLUID CLEANLINESS | method | limit/base | current | history1 | history2 |
|-------------------|--------------|------------|-------------------|----------|----------|
| Particles >4µm | ASTM D7647 | | 9727 | --- | --- |
| Particles >6µm | ASTM D7647 | >1300 | ▲ 3418 | --- | --- |
| Particles >14µm | ASTM D7647 | >80 | ▲ 238 | --- | --- |
| Particles >21µm | ASTM D7647 | >20 | ▲ 51 | --- | --- |
| Particles >38µm | ASTM D7647 | >4 | 0 | --- | --- |
| Particles >71µm | ASTM D7647 | >3 | 0 | --- | --- |
| Oil Cleanliness | ISO 4406 (c) | >--/17/13 | ▲ 20/19/15 | --- | --- |

| FLUID DEGRADATION | method | limit/base | current | history1 | history2 |
|-------------------|----------|----------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g | ASTM D8045 0.4 | 0.36 | --- | --- |

OIL ANALYSIS REPORT

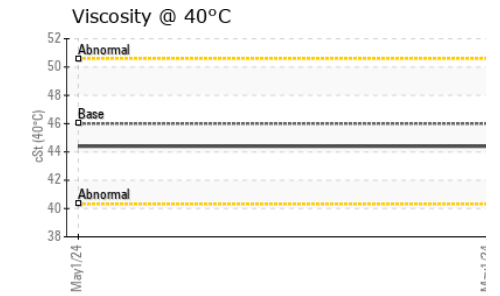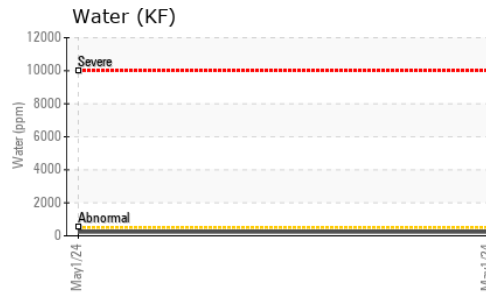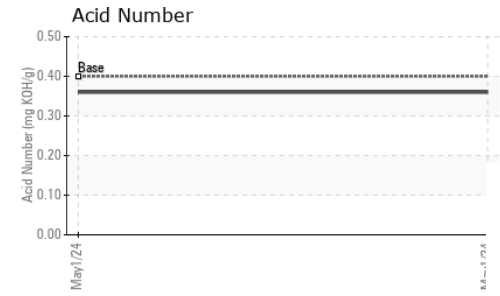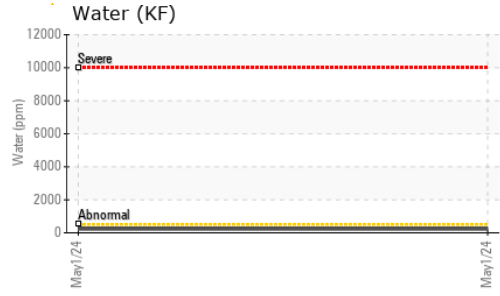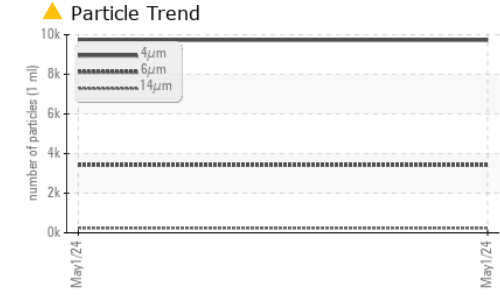





| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|--------------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.05 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|-------------|----------|
| Visc @ 40°C | cSt | ASTM D445 | 46 | 44.4 | --- |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

| | | | |
|--------|--|----------|----------|
| Color | | no image | no image |
| Bottom | | no image | no image |

GRAPHS

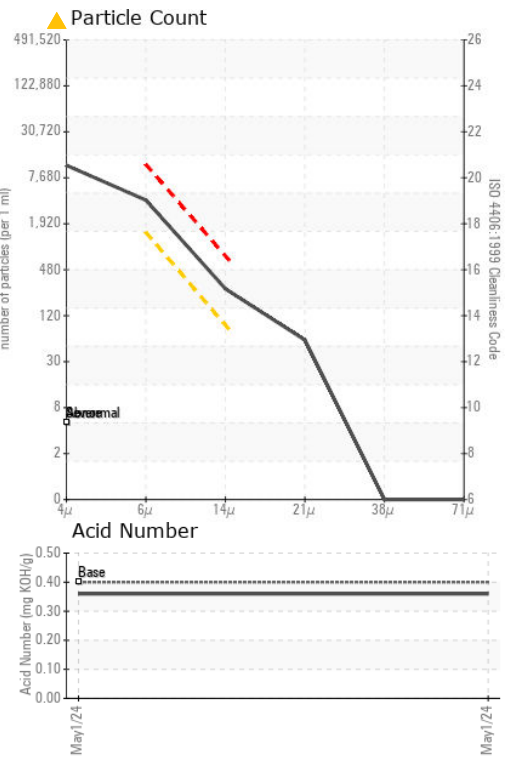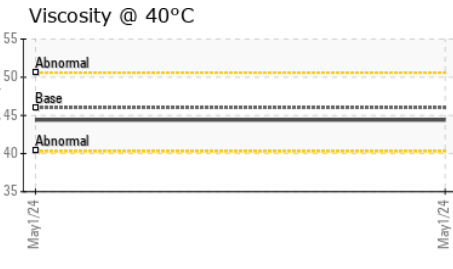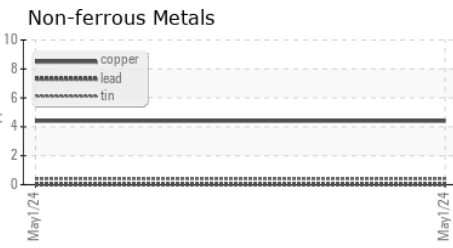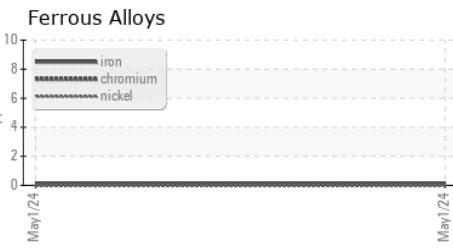

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : KC123260
Lab Number : 06184985
Unique Number : 11036311
Test Package : IND 2
Received : 20 May 2024
Tested : 22 May 2024
Diagnosed : 22 May 2024 - Jonathan Hester

SUPERIOR AUTO BODY
 6700 49TH ST N
 PINELLAS PARK, FL
 US 33781
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)