

### **FUEL REPORT**

Sample Rating Trend

ISO

#### Machine Id

# TANK 2 - FALKENBURG RD SPECTRUM

Tank Diesel Fuel Fluid DIESEL FUEL No. 2 (--- GAL)

#### DIAGNOSIS

#### Recommendation

We advise that you filter this fluid before use. All laboratory tests indicate that this sample meets specifications for No.2 low-sulfur diesel fuel.

#### Corrosion

All metal levels are normal indicating no corrosion in the system.

#### Contaminants

There is a high amount of particulates present in the fuel. There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible.

#### **Fuel Condition**

Sulfur value derived by ASTM D5453 method for ULSD validation.


SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0937959		
Sample Date		Client Info		15 May 2024		
Machine Age	hrs	Client Info		0		
Sample Status				ABNORMAL		
PHYSICAL PROP	PERTIES	method	limit/base	current	history1	history2
ASTM Color	scalar	*ASTM D1500		L4.0		
Visc @ 40°C	cSt	ASTM D445	4.1	2.49		
SULFUR CONTE		method	limit/base	-		
			IIIIII/Dase		history1	history2
Sulfur	ppm	ASTM D5185m		58		
Sulfur (UVF)	ppm	ASTM D5453		55		
CONTAMINANTS	3	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<1		
Sodium	ppm	ASTM D5185m	<0.1	<1		
Potassium	ppm	ASTM D5185m	<0.1	0		
Water	%	ASTM D6304	<0.05	0.004		
ppm Water	ppm	ASTM D6304	<500	47		
% Gasoline	%	*In-House		0.0		
% Biodiesel	%	*In-House	<20.0	0.0		
FLUID CLEANLIN	IESS	method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>2500	<u> </u>		
Particles >6µm		ASTM D7647	>640	<u> </u>		
Particles >14µm		ASTM D7647	>80	<u> </u>		
Particles >21µm		ASTM D7647	>20	<u> </u>		
Particles >38µm		ASTM D7647	>4	3		
Particles >71µm		ASTM D7647		0		
Oil Cleanliness		ISO 4406 (c)	>18/16/13	<u> </u>		
HEAVY METALS		method	limit/base	current	history1	history2
Aluminum	ppm	ASTM D5185m	<0.1	0		
Nickel	ppm	ASTM D5185m	<0.1	0		
Lead	ppm	ASTM D5185m	<0.1	0		
Vanadium	ppm	ASTM D5185m	<0.1	<1		
Iron	ppm	ASTM D5185m	<0.1	0		
Calcium	ppm	ASTM D5185m	<0.1	0		
Magnesium	ppm	ASTM D5185m	<0.1	0		
Phosphorus	ppm	ASTM D5185m		<1		
Zinc	ppm	ASTM D5185m	<0.1	0		
SAMPLE IMAGE	S	method	limit/base	current	history1	history2
Color				a.	no image	no image
Bottom					no image	no image


Page 1 of 2



## **FUEL REPORT**

GRAPHS

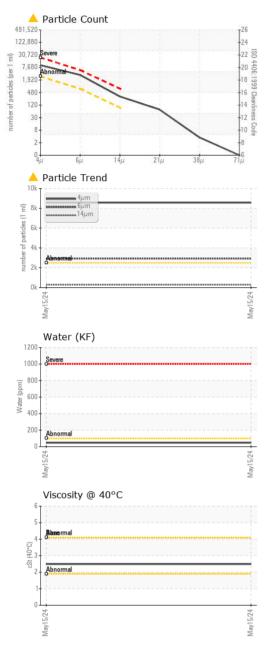



AGRILAND FS, INC Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513 Sample No. : WC0937959 Received : 20 May 2024 3321 LANDING PLACE Lab Number : 06185693 Tested : 24 May 2024 PALM HARBOR, FL Unique Number : 11037019 Diagnosed : 24 May 2024 - Doug Bogart US 34684 Test Package : DF-5 (Additional Tests: Screen) Contact: GREG GORKEN Certificate 12367 To discuss this sample report, contact Customer Service at 1-800-237-1369. ggorken@agrilandfs.com \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation. T: Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012) F:

Contact/Location: GREG GORKEN - AGRPALFL Page 2 of 2