




OIL ANALYSIS REPORT



Machine Id
CATERPILLAR 336F 8394 (S/N RKB00528)
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON XL SYN BLEND 15W40 (--- GAL)

Sample Rating Trend

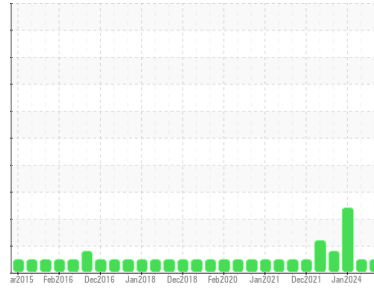

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0913357	WC0879456	WC0879316
Sample Date	Client Info			29 May 2024	19 Feb 2024	02 Jan 2024
Machine Age	hrs	Client Info		12719	12525	12312
Oil Age	hrs	Client Info		658	557	534
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	ABNORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	25	15	65
Chromium	ppm	ASTM D5185m	>20	<1	<1	2
Nickel	ppm	ASTM D5185m	>2	0	0	0
Titanium	ppm	ASTM D5185m	>2	0	0	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	5	2	5
Lead	ppm	ASTM D5185m	>40	0	4	2
Copper	ppm	ASTM D5185m	>330	3	3	9
Tin	ppm	ASTM D5185m	>15	1	<1	1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	1	4	5	5
Barium	ppm	ASTM D5185m	1	0	0	0
Molybdenum	ppm	ASTM D5185m	60	58	63	60
Manganese	ppm	ASTM D5185m	1	<1	<1	0
Magnesium	ppm	ASTM D5185m	1010	924	1008	910
Calcium	ppm	ASTM D5185m	1070	1182	1127	1121
Phosphorus	ppm	ASTM D5185m	1150	1059	1173	927
Zinc	ppm	ASTM D5185m	1270	1257	1373	1178
Sulfur	ppm	ASTM D5185m	2060	3404	3227	2848

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	14	7	▲ 37
Sodium	ppm	ASTM D5185m		2	2	1
Potassium	ppm	ASTM D5185m	>20	0	2	<1


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	1.6	0.4	▲ 3.3
Nitration	Abs/cm	*ASTM D7624	>20	9.3	10.9	11.7
Sulfation	Abs/.1mm	*ASTM D7415	>30	20.1	23.0	25.1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.7	20.9	16.9
Base Number (BN)	mg KOH/g	ASTM D2896	9.6	7.6	7.3	5.6




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

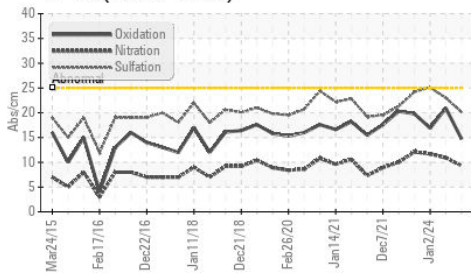

Base Number

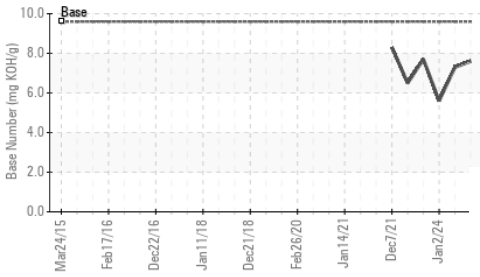

Viscosity @ 100°C

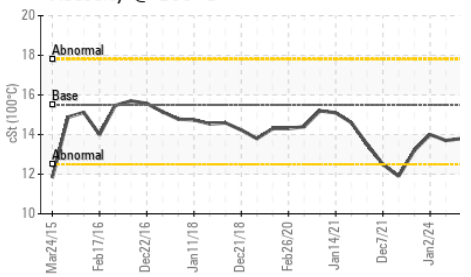


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.5	13.8	13.7

GRAPHS


Ferrous Alloys

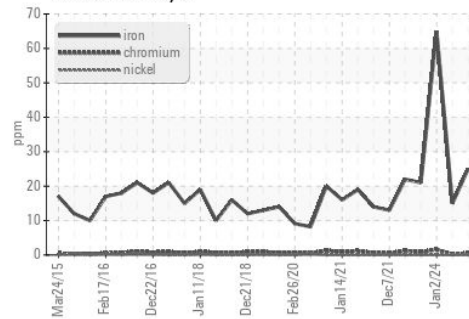


Non-ferrous Metals

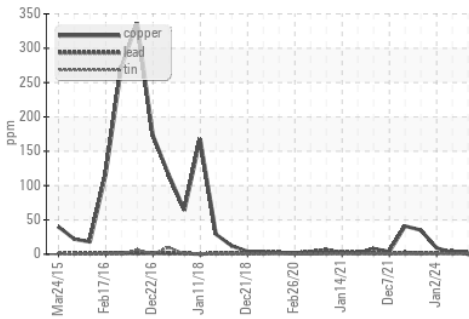

Viscosity @ 100°C

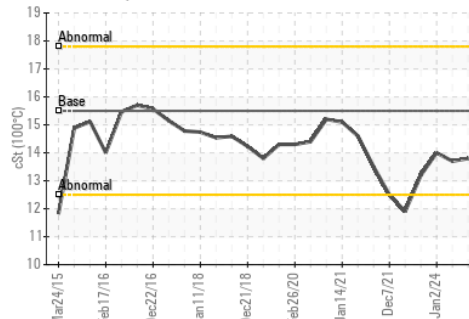

Base Number

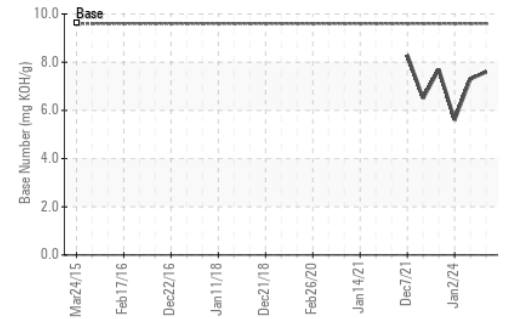

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0913357 Received : 31 May 2024
 Lab Number : 06196214 Tested : 03 Jun 2024
 Unique Number : 11058337 Diagnosed : 03 Jun 2024 - Wes Davis
 Test Package : CONST (Additional Tests: TBN)

TRADER CONSTRUCTION CO.
 PO DRAWER 1578
 NEW BERN, NC
 US 28563
 Contact: MIKE WYATT
 mw Wyatt@traderconstruction.com
 T: (252)633-1399
 F: (252)638-4871

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)