




# OIL ANALYSIS REPORT

Sample Rating Trend

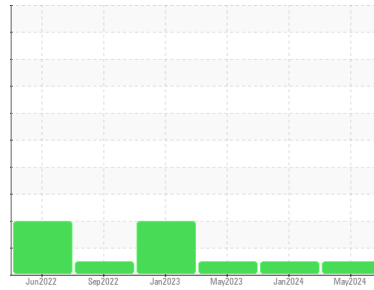

**NORMAL**



Machine Id  
**KAESER AS 20 3911913 (S/N 4311)**  
 Component  
**Compressor**  
 Fluid  
**2015-46 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC128346</b>	KC123302	KC101066
Sample Date	Client Info			<b>07 May 2024</b>	29 Jan 2024	16 May 2023
Machine Age	hrs	Client Info		<b>19138</b>	18155	17653
Oil Age	hrs	Client Info		<b>824</b>	0	719
Oil Changed	Client Info			<b>Not Changed</b>	N/A	Not Changed
Sample Status				<b>NORMAL</b>	NORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m	>10	<b>0</b>	<1	0
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	0
Barium	ppm	ASTM D5185m		<b>10</b>	0	0
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	0
Magnesium	ppm	ASTM D5185m		<b>85</b>	0	<1
Calcium	ppm	ASTM D5185m		<b>2</b>	1	0
Phosphorus	ppm	ASTM D5185m		<b>&lt;1</b>	363	97
Zinc	ppm	ASTM D5185m		<b>5</b>	0	19

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	0	0
Sodium	ppm	ASTM D5185m		<b>19</b>	3	0
Potassium	ppm	ASTM D5185m	>20	<b>6</b>	2	1
Water	%	ASTM D6304	>0.05	<b>0.026</b>	0.002	0.001
ppm Water	ppm	ASTM D6304	>500	<b>262</b>	20	9.7

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>1145</b>	1427	4956
Particles >6µm		ASTM D7647	>1300	<b>507</b>	490	1183
Particles >14µm		ASTM D7647	>80	<b>75</b>	49	18
Particles >21µm		ASTM D7647	>20	<b>22</b>	18	3
Particles >38µm		ASTM D7647	>4	<b>0</b>	2	0
Particles >71µm		ASTM D7647	>3	<b>0</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>17/16/13</b>	18/16/13	19/17/11

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>0.33</b>	0.16	0.06


# OIL ANALYSIS REPORT

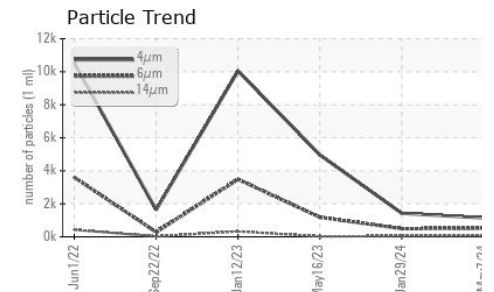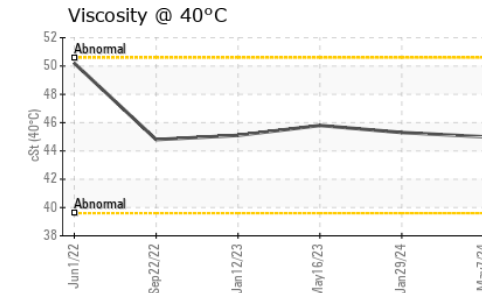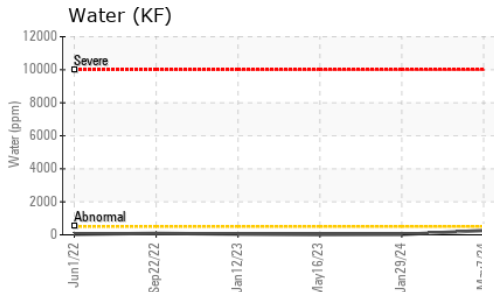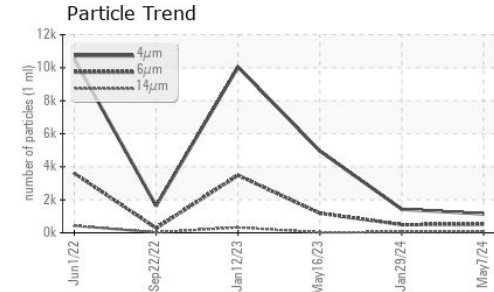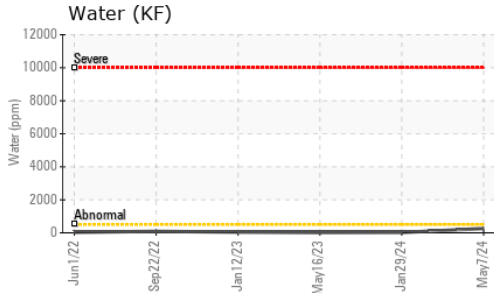






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.0	45.3	45.8

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

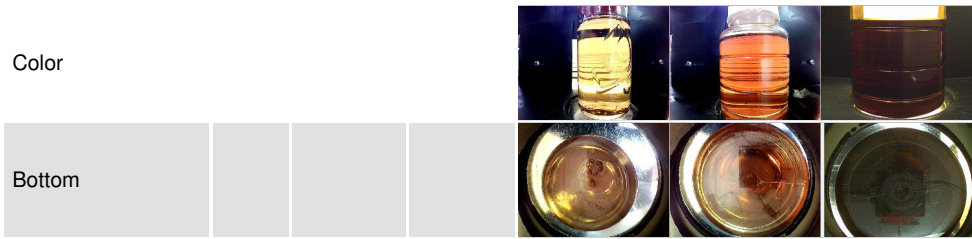

## GRAPHS

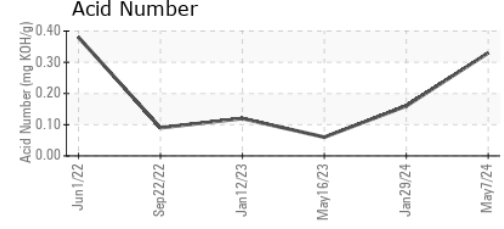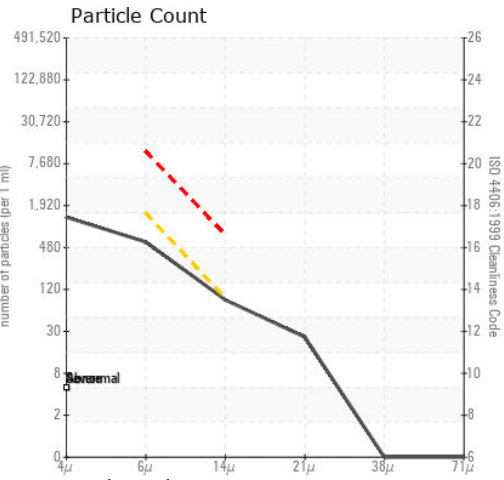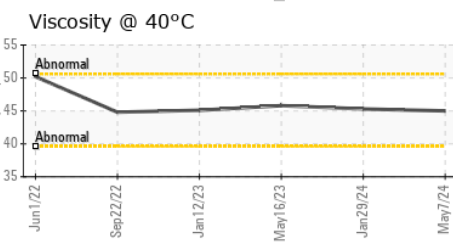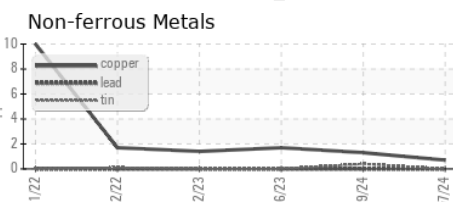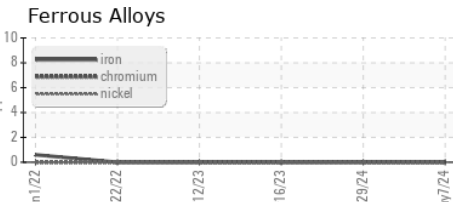

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC128346  
**Lab Number** : 06196692  
**Unique Number** : 11058815  
**Test Package** : IND 2  
**Received** : 31 May 2024  
**Tested** : 03 Jun 2024  
**Diagnosed** : 03 Jun 2024 - Don Baldrige

**CUTRALE CITRUS JUICES**  
 602 MCKEAN ST  
 LAKELAND, FL  
 US 33823  
 Contact: SERVICE MANAGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)