



# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**



Machine Id  
**NOT GIVEN WC0676347**  
 Component  
**Diesel Engine**  
 Fluid  
**ALPHA MEGA MOLY 15W40 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0676347</b>	---	---
Sample Date	Client Info			<b>17 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>6029</b>	---	---
Oil Age	hrs	Client Info		<b>825</b>	---	---
Oil Changed	Client Info			<b>Changed</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	---	---
Water	WC Method	>0.2		<b>NEG</b>	---	---
Glycol	WC Method			<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>43</b>	---	---
Chromium	ppm	ASTM D5185m	>20	<b>1</b>	---	---
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m	>3	<b>&lt;1</b>	---	---
Aluminum	ppm	ASTM D5185m	>20	<b>3</b>	---	---
Lead	ppm	ASTM D5185m	>40	<b>8</b>	---	---
Copper	ppm	ASTM D5185m	>330	<b>3</b>	---	---
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	---	---
Barium	ppm	ASTM D5185m		<b>2</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>129</b>	---	---
Manganese	ppm	ASTM D5185m		<b>2</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>31</b>	---	---
Calcium	ppm	ASTM D5185m		<b>2563</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>390</b>	---	---
Zinc	ppm	ASTM D5185m		<b>2983</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>12201</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>8</b>	---	---
Sodium	ppm	ASTM D5185m		<b>6</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>4</b>	---	---


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.9</b>	---	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>9.3</b>	---	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>47.7</b>	---	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>46.2</b>	---	---
Acid Number (AN)	mg KOH/g	ASTM D8045		<b>2.47</b>	---	---
Base Number (BN)	mg KOH/g	ASTM D2896		<b>9.53</b>	---	---




# OIL ANALYSIS REPORT


FT-IR (Direct Trend)

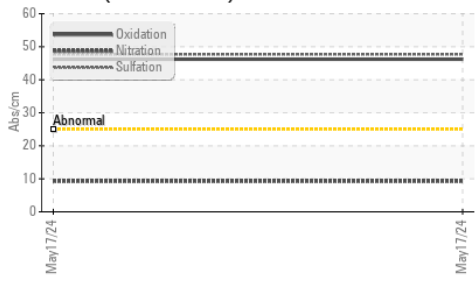


Acid Number

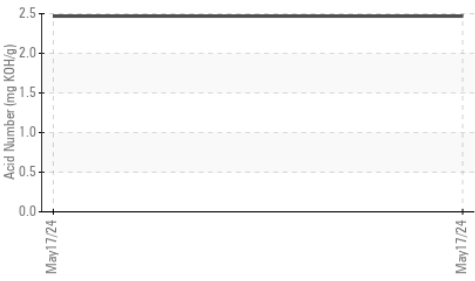

Base Number

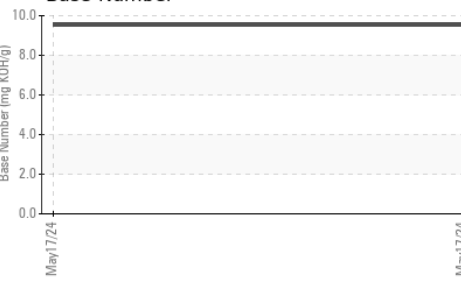

Viscosity @ 100°C

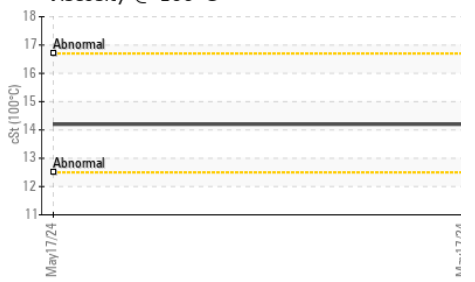


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	---	---
Precipitate	scalar	*Visual	NONE	---	---
Silt	scalar	*Visual	NONE	---	---
Debris	scalar	*Visual	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	---	---
Appearance	scalar	*Visual	NORML	---	---
Odor	scalar	*Visual	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	---	---
Free Water	scalar	*Visual	---	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.2	---	---

GRAPHS

Iron (ppm)

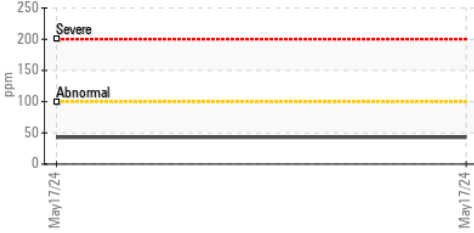

Lead (ppm)




Aluminum (ppm)




Chromium (ppm)




Copper (ppm)

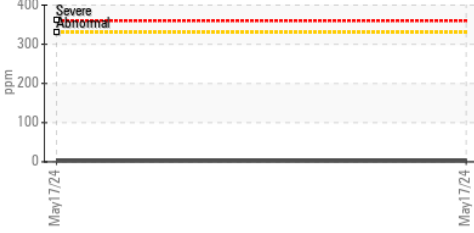


Silicon (ppm)

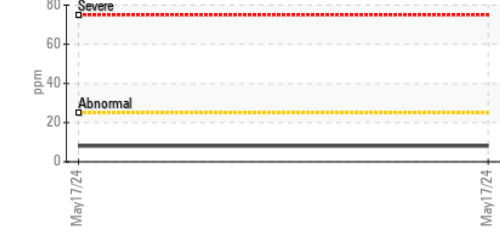

Viscosity @ 100°C

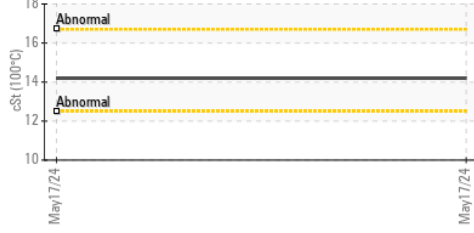

Base Number

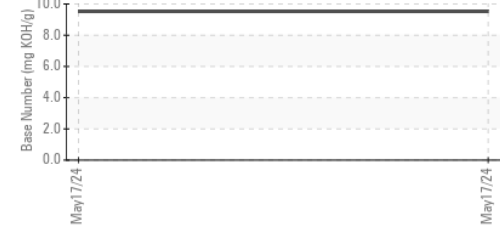

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0676347      **Received** : 31 May 2024  
**Lab Number** : 06196854      **Tested** : 03 Jun 2024  
**Unique Number** : 11058977      **Diagnosed** : 03 Jun 2024 - Sean Felton  
**Test Package** : MOB 2

**L-FAB ENTERPRISES LLC**  
 130 SALEM RD  
 KIRKWOOD, PA  
 US 17536  
 Contact: MELVIN FISHER  
 lrvineer@aol.com  
 T: (717)529-3957  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)