




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

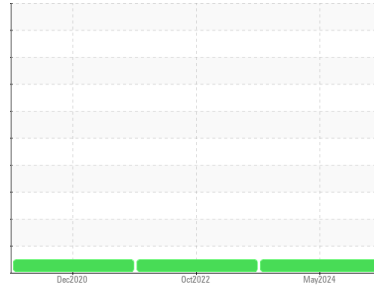

Area
[W/O 10848]
 Machine Id
VOLVO L90H 623915
 Component
Front Axle
 Fluid
VOLVO WB 102 (8 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			ML0001262	VCP328232	VCP294158
Sample Date	Client Info			28 May 2024	13 Oct 2022	14 Dec 2020
Machine Age	hrs	Client Info		11224	8591	4845
Oil Age	hrs	Client Info		2633	0	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>300	12	35	68
Chromium	ppm	ASTM D5185m	>10	0	1	1
Nickel	ppm	ASTM D5185m	>4	0	0	1
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>15	<1	<1	2
Lead	ppm	ASTM D5185m	>4	0	0	4
Copper	ppm	ASTM D5185m	>200	0	<1	<1
Tin	ppm	ASTM D5185m	>15	0	<1	0
Antimony	ppm	ASTM D5185m	>4	---	---	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	<1

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		156	125	116
Barium	ppm	ASTM D5185m		0	2	0
Molybdenum	ppm	ASTM D5185m		0	8	0
Manganese	ppm	ASTM D5185m		<1	2	<1
Magnesium	ppm	ASTM D5185m		20	73	17
Calcium	ppm	ASTM D5185m		4044	3659	3859
Phosphorus	ppm	ASTM D5185m		1309	1245	1215
Zinc	ppm	ASTM D5185m		1618	1583	1621
Sulfur	ppm	ASTM D5185m		4054	4958	3378

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	15	12	13
Sodium	ppm	ASTM D5185m		<1	7	<1
Potassium	ppm	ASTM D5185m	>20	0	0	0

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG	NEG




OIL ANALYSIS REPORT

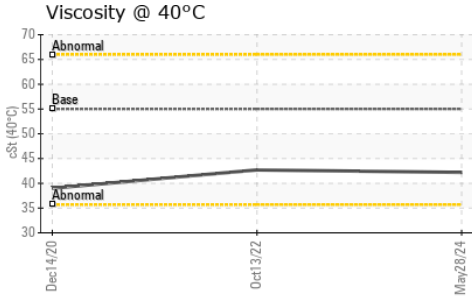

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 55	42.2	42.7	39.0

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

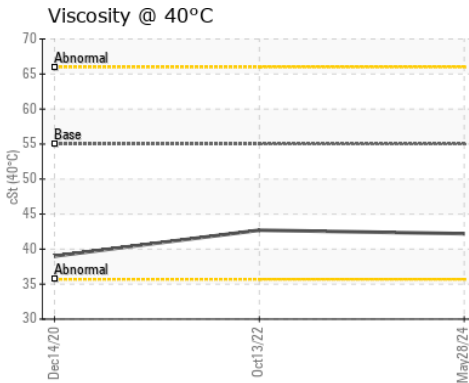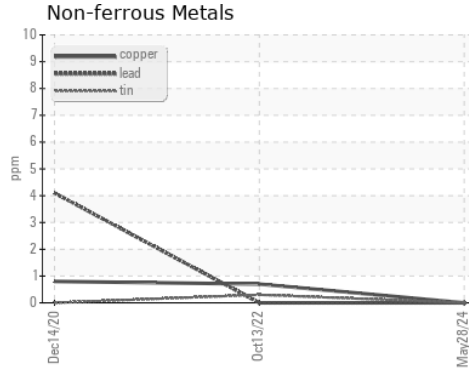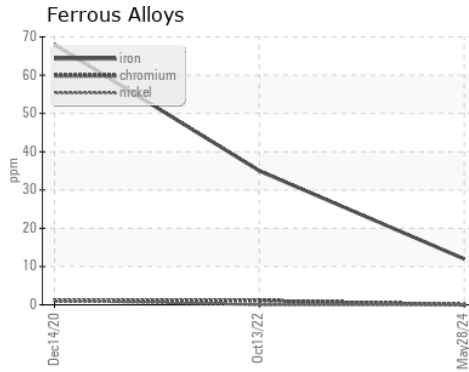

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : ML0001262
Lab Number : 06197107
Unique Number : 11059230
Test Package : CONST

Received : 31 May 2024
Tested : 03 Jun 2024
Diagnosed : 04 Jun 2024 - Don Baldrige

MCCLUNG-LOGAN EQUIPMENT CO - BALTIMORE
 4601 WASHINGTON BOULEVARD
 BALTIMORE, MD
 US 21227

Contact: MARK CIULLA
 mciulla@mcclung-logan.com

T: (410)242-6500
 F: (410)242-7835

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)