


# OIL ANALYSIS REPORT

## Sample Rating Trend



**NORMAL**

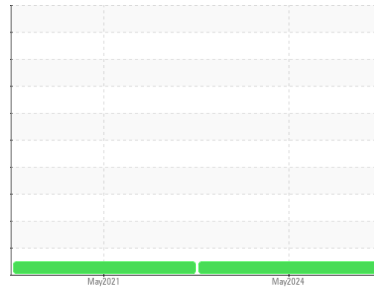

Machine Id  
**VOLVO A30G 740132**  
 Component  
**Front Axle**  
 Fluid  
**VOLVO WB 102 (--- GAL)**

### DIAGNOSIS

#### Recommendation

Resample at the next service interval to monitor.

#### Wear

All component wear rates are normal.

#### Contamination

There is no indication of any contamination in the oil.

#### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>ML0001659</b>	VCP302724	---
Sample Date	Client Info			<b>22 May 2024</b>	18 May 2021	---
Machine Age	hrs	Client Info		<b>0</b>	3976	---
Oil Age	hrs	Client Info		<b>0</b>	0	---
Oil Changed	Client Info			<b>N/A</b>	Changed	---
Sample Status				<b>NORMAL</b>	NORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	<b>NEG</b>	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>900	<b>228</b>	286	---
Chromium	ppm	ASTM D5185m	>20	<b>4</b>	5	---
Nickel	ppm	ASTM D5185m	>10	<b>1</b>	2	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m		<b>0</b>	<1	---
Aluminum	ppm	ASTM D5185m	>30	<b>2</b>	0	---
Lead	ppm	ASTM D5185m	>50	<b>2</b>	<1	---
Copper	ppm	ASTM D5185m	>150	<b>65</b>	7	---
Tin	ppm	ASTM D5185m	>20	<b>3</b>	<1	---
Antimony	ppm	ASTM D5185m	>5	<b>---</b>	0	---
Vanadium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>261</b>	297	---
Barium	ppm	ASTM D5185m		<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m		<b>5</b>	5	---
Magnesium	ppm	ASTM D5185m		<b>14</b>	0	---
Calcium	ppm	ASTM D5185m		<b>3459</b>	19	---
Phosphorus	ppm	ASTM D5185m		<b>1619</b>	2343	---
Zinc	ppm	ASTM D5185m		<b>1391</b>	7	---
Sulfur	ppm	ASTM D5185m		<b>10416</b>	23900	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	<b>13</b>	3	---
Sodium	ppm	ASTM D5185m		<b>4</b>	4	---
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	0	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	MODER	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>LIGHT</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

# OIL ANALYSIS REPORT



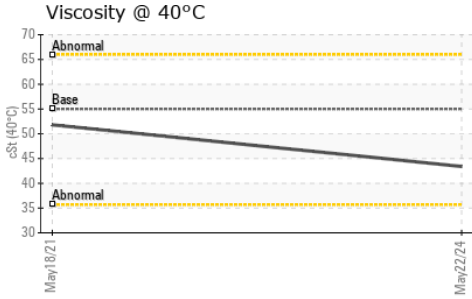


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 55	<b>43.4</b>	51.8	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

## GRAPHS

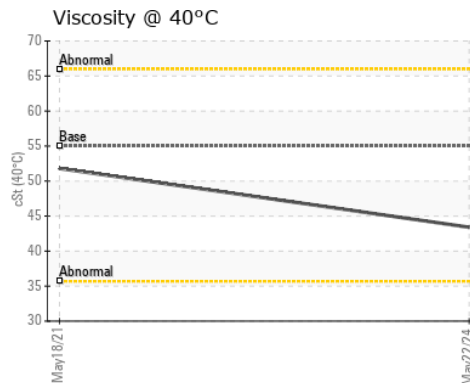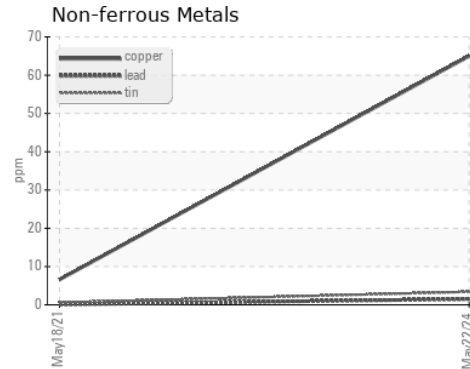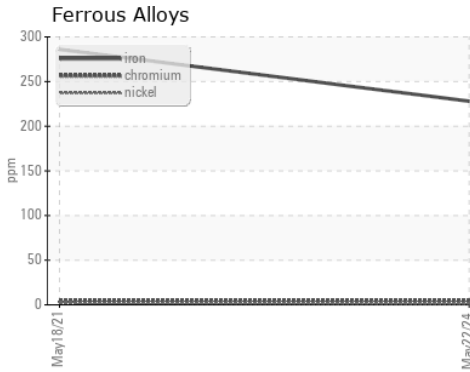

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : ML0001659  
**Lab Number** : **06197147**  
**Unique Number** : 11059270  
**Test Package** : CONST

**Received** : 31 May 2024  
**Tested** : 03 Jun 2024  
**Diagnosed** : 04 Jun 2024 - Don Baldrige

**McCLUNG-LOGAN EQUIPMENT CO - BRIDGEVILLE**  
 17941 SUSSEX HIGHWAY  
 BRIDGEVILLE, DE  
 US 19933  
 Contact: MATT CLARK  
 MCLARK@mcclung-logan.com  
 T: (302)337-3400  
 F: (302)337-9083

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)