




OIL ANALYSIS REPORT



Area
MINING
Machine Id
ME-54 CATERPILLAR 770 BZZ0601
Component
Diesel Engine
Fluid
SHELL RIMULA SUPER SAE 15W40 (12 GAL)

Sample Rating Trend

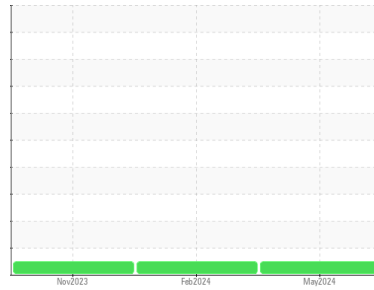

NORMAL



DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0908944	WC0901891	WC0864713
Sample Date	Client Info			20 May 2024	05 Feb 2024	20 Nov 2023
Machine Age	hrs	Client Info		28033	26706	26549
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			Changed	Changed	Changed
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method	>0.2		NEG	NEG	NEG
Glycol	WC Method			NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	13	6	12
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>2	<1	0	0
Titanium	ppm	ASTM D5185m	>2	<1	0	0
Silver	ppm	ASTM D5185m	>2	<1	0	0
Aluminum	ppm	ASTM D5185m	>25	1	2	<1
Lead	ppm	ASTM D5185m	>40	2	0	2
Copper	ppm	ASTM D5185m	>330	17	8	13
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		0	0	<1
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	<1
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		58	55	58
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m		455	545	918
Calcium	ppm	ASTM D5185m	2840	1638	1471	1160
Phosphorus	ppm	ASTM D5185m	1150	1085	1029	1071
Zinc	ppm	ASTM D5185m	1270	1250	1180	1253
Sulfur	ppm	ASTM D5185m	2829	3669	3386	3170





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	3	3	4
Sodium	ppm	ASTM D5185m		0	<1	2
Potassium	ppm	ASTM D5185m	>20	1	<1	<1
Fuel	%	ASTM D3524	>5	0.4	<1.0	<1.0

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.6	0.3	0.6
Nitration	Abs/cm	*ASTM D7624	>20	7.0	5.9	7.3
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.2	18.5	19.8

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	14.4	13.8	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	10.6	8.1	8.9	9.1







OIL ANALYSIS REPORT

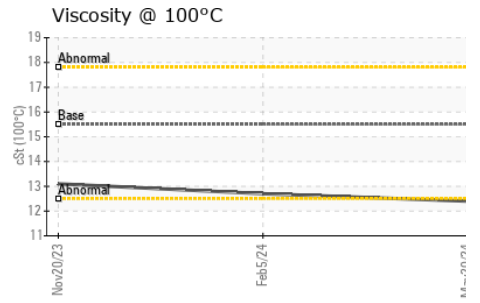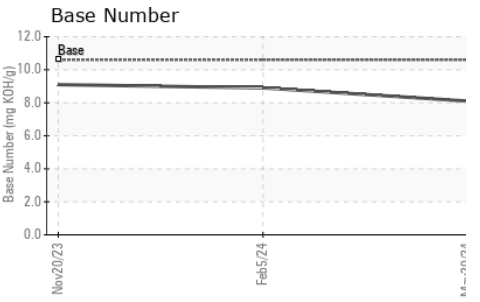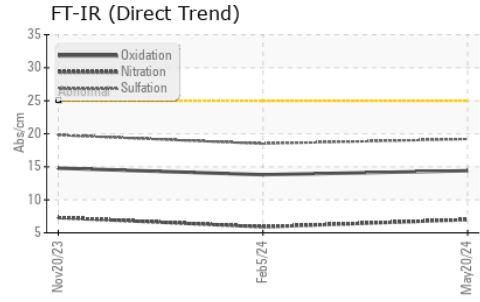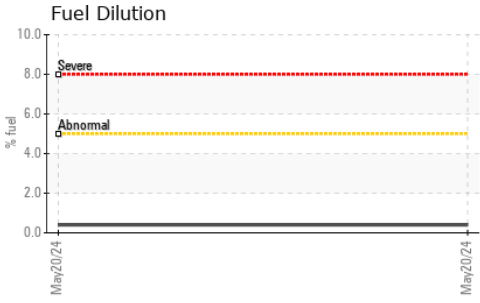

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.5	12.4	12.7	13.1

GRAPHS

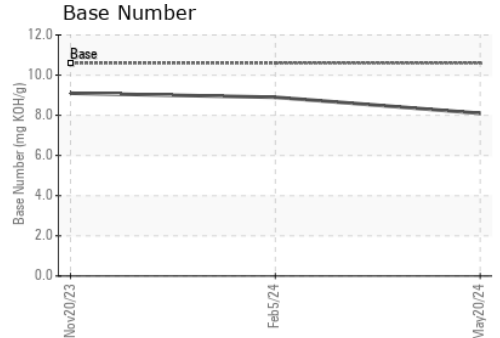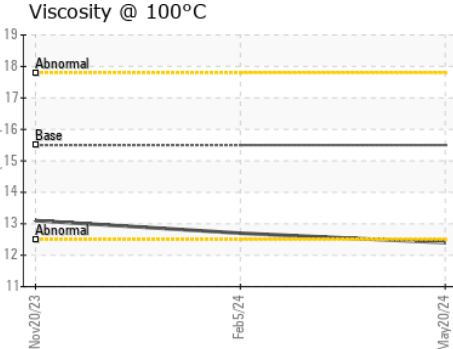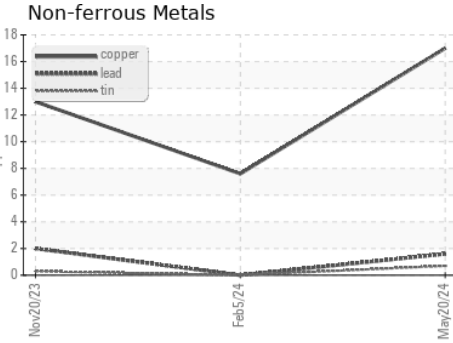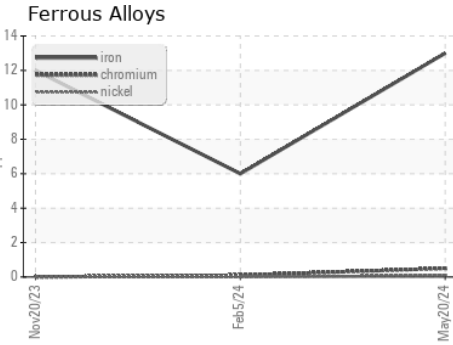

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0908944 **Received** : 03 Jun 2024
Lab Number : **06197427** **Tested** : 05 Jun 2024
Unique Number : 11059550 **Diagnosed** : 05 Jun 2024 - Wes Davis
Test Package : CONST (Additional Tests: FuelDilution, PercentFuel, TBN)

COVIA - GUION - 025
 421 MAIN STREET
 GUION, AR
 US 72540
 Contact: DANIEL DELGADO
 daniel.delgado@coviacorp.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: