




OIL ANALYSIS REPORT

Sample Rating Trend

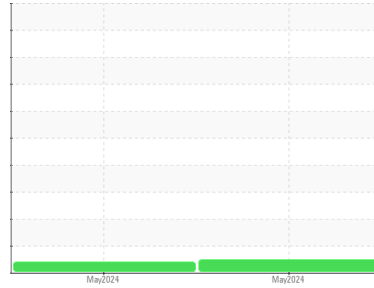

NORMAL



Machine Id
13059
 Component
Rear Differential
 Fluid
GEAR OIL SAE 75W90 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0896237	WC0896143	---
Sample Date	Client Info			24 May 2024	06 May 2024	---
Machine Age	mls	Client Info		38288	32382	---
Oil Age	mls	Client Info		0	0	---
Oil Changed	Client Info			N/A	N/A	---
Sample Status				NORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>500	82	108	---
Chromium	ppm	ASTM D5185m	>10	<1	1	---
Nickel	ppm	ASTM D5185m	>10	<1	0	---
Titanium	ppm	ASTM D5185m		<1	<1	---
Silver	ppm	ASTM D5185m		0	<1	---
Aluminum	ppm	ASTM D5185m	>25	3	4	---
Lead	ppm	ASTM D5185m	>25	<1	<1	---
Copper	ppm	ASTM D5185m	>100	<1	<1	---
Tin	ppm	ASTM D5185m	>10	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	<1	---
Cadmium	ppm	ASTM D5185m		<1	0	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	400	297	296	---
Barium	ppm	ASTM D5185m	200	2	0	---
Molybdenum	ppm	ASTM D5185m	12	<1	<1	---
Manganese	ppm	ASTM D5185m		2	4	---
Magnesium	ppm	ASTM D5185m	12	4	0	---
Calcium	ppm	ASTM D5185m	150	62	8	---
Phosphorus	ppm	ASTM D5185m	1650	1595	1550	---
Zinc	ppm	ASTM D5185m	125	34	0	---
Sulfur	ppm	ASTM D5185m	22500	27278	30955	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>75	36	44	---
Sodium	ppm	ASTM D5185m		6	9	---
Potassium	ppm	ASTM D5185m	>20	3	3	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	LIGHT	NONE	---
Debris	scalar	*Visual	NONE	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---



OIL ANALYSIS REPORT

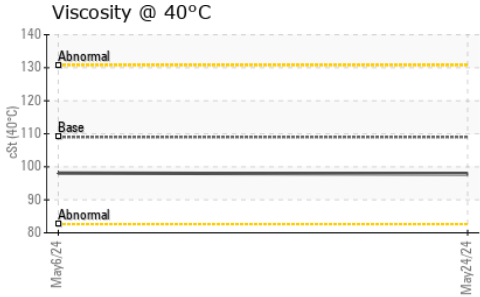




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	109	97.8	98.1	---
-------------	-----	-----------	-----	-------------	------	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

GRAPHS

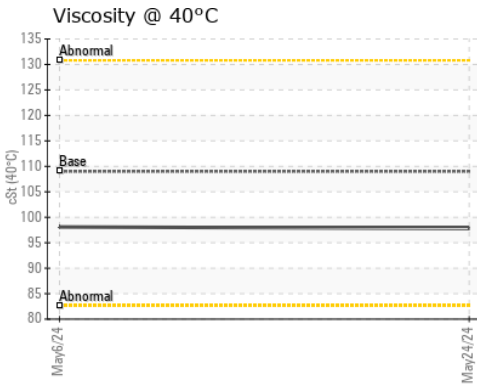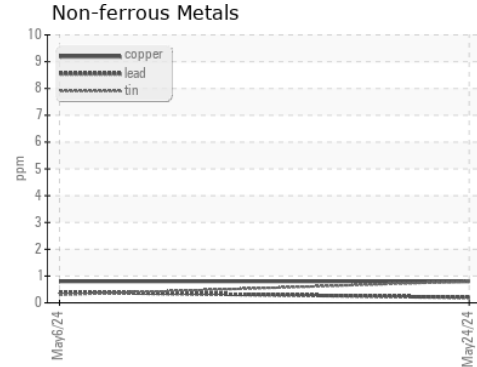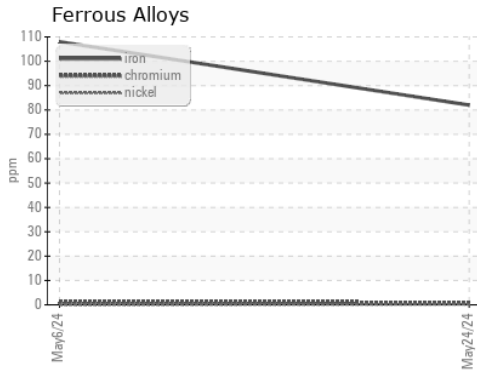

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0896237 **Received** : 03 Jun 2024
Lab Number : **06198442** **Tested** : 04 Jun 2024
Unique Number : 11060565 **Diagnosed** : 04 Jun 2024 - Wes Davis
Test Package : FLEET

LTI - BELGRADE
 180 THUNDER RD
 BELGRADE, MT
 US 59714
 Contact: BERT SMITH
 BERT@LYNDEN.COM
 T: (406)209-2961
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)