



# OIL ANALYSIS REPORT

Sample Rating Trend



**NORMAL**



Machine Id  
**SUTPHEN RL 8**  
 Component  
**Front Hydraulic System**  
 Fluid  
 {not provided} (--- GAL)

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.  
 Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>WC0930946</b>	---	---
Sample Date	Client Info			<b>19 May 2024</b>	---	---
Machine Age	hrs	Client Info		<b>0</b>	---	---
Oil Age	hrs	Client Info		<b>0</b>	---	---
Oil Changed	Client Info			<b>Not Chngd</b>	---	---
Sample Status				<b>NORMAL</b>	---	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	<b>NEG</b>	---	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<b>8</b>	---	---
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Nickel	ppm	ASTM D5185m	>10	<b>0</b>	---	---
Titanium	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Silver	ppm	ASTM D5185m		<b>0</b>	---	---
Aluminum	ppm	ASTM D5185m	>10	<b>4</b>	---	---
Lead	ppm	ASTM D5185m	>10	<b>1</b>	---	---
Copper	ppm	ASTM D5185m	>75	<b>10</b>	---	---
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	---	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	---	---
Cadmium	ppm	ASTM D5185m		<b>1</b>	---	---


ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>52</b>	---	---
Barium	ppm	ASTM D5185m		<b>19</b>	---	---
Molybdenum	ppm	ASTM D5185m		<b>&lt;1</b>	---	---
Manganese	ppm	ASTM D5185m		<b>0</b>	---	---
Magnesium	ppm	ASTM D5185m		<b>6</b>	---	---
Calcium	ppm	ASTM D5185m		<b>209</b>	---	---
Phosphorus	ppm	ASTM D5185m		<b>258</b>	---	---
Zinc	ppm	ASTM D5185m		<b>146</b>	---	---
Sulfur	ppm	ASTM D5185m		<b>1522</b>	---	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	<b>4</b>	---	---
Sodium	ppm	ASTM D5185m		<b>1</b>	---	---
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	---	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	---	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	---	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	---	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	---	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	---	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	---	---
Emulsified Water	scalar	*Visual	>0.1	<b>NEG</b>	---	---
Free Water	scalar	*Visual		<b>NEG</b>	---	---



# OIL ANALYSIS REPORT

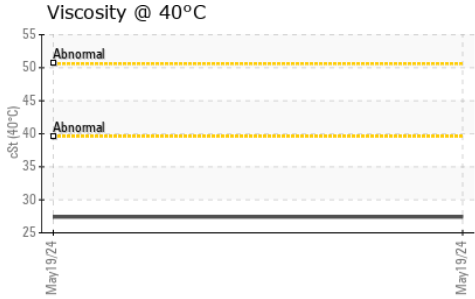




### FLUID PROPERTIES

Property	Method	Limit/Base	Current	History 1	History 2
Visc @ 40°C	cSt	ASTM D445	27.4	---	---

### SAMPLE IMAGES

Property	Method	Limit/Base	Current	History 1	History 2
Color				no image	no image
Bottom				no image	no image

### GRAPHS

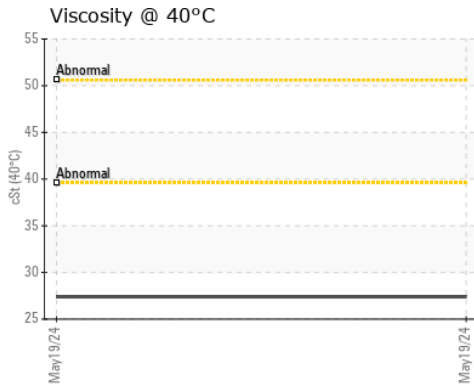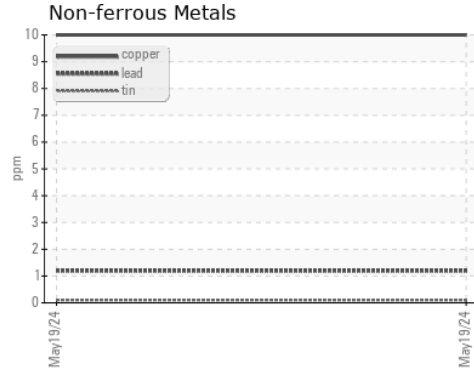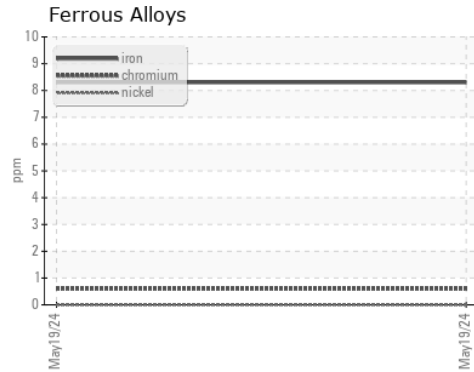

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0930946  
**Lab Number** : 06200940  
**Unique Number** : 11063063  
**Test Package** : FLEET

**Received** : 05 Jun 2024  
**Tested** : 08 Jun 2024  
**Diagnosed** : 08 Jun 2024 - Don Baldrige

**BOSSIER CITY FIRE DEPT**  
 5850 SHED RD  
 BOSSIER CITY, LA  
 US 71111  
 Contact: K JOHNSON  
 JOHNSONK@FIRESERVERRO.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: