


# OIL ANALYSIS REPORT

Sample Rating Trend



**VIS DEBRIS**

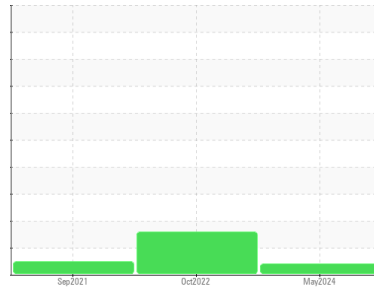

Machine Id

**KAESER SK 26 1188711 (S/N 1143)**

Component

**Compressor**

Fluid

**KAESER SIGMA (OEM) S-460 (--- GAL)**

**DIAGNOSIS**

**▲ Recommendation**

No corrective action is recommended at this time. The filter change at the time of sampling has been noted. Resample at the next service interval to monitor. We were unable to perform a particle count due to a high concentration of particles present in this sample.

**Wear**

All component wear rates are normal.

**▲ Contamination**

Moderate concentration of visible dirt/debris present in the oil.

**Fluid Condition**

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>KC132063</b>	KC96618	KC92595
Sample Date	Client Info			<b>31 May 2024</b>	24 Oct 2022	22 Sep 2021
Machine Age	hrs	Client Info		<b>107007</b>	102867	100130
Oil Age	hrs	Client Info		<b>4200</b>	5400	3300
Oil Changed	Client Info			<b>Not Changed</b>	Changed	Not Changed
Sample Status				<b>ABNORMAL</b>	ABNORMAL	NORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>50	<b>0</b>	<1	<1
Chromium	ppm	ASTM D5185m	>10	<b>&lt;1</b>	0	0
Nickel	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	<1	<1
Aluminum	ppm	ASTM D5185m	>10	<b>2</b>	<1	0
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>50	<b>7</b>	2	1
Tin	ppm	ASTM D5185m	>10	<b>&lt;1</b>	<1	0
Antimony	ppm	ASTM D5185m		<b>---</b>	---	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0




ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		<b>0</b>	0	<1
Barium	ppm	ASTM D5185m	90	<b>3</b>	0	5
Molybdenum	ppm	ASTM D5185m		<b>0</b>	0	0
Manganese	ppm	ASTM D5185m		<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m	90	<b>19</b>	3	14
Calcium	ppm	ASTM D5185m	2	<b>0</b>	0	0
Phosphorus	ppm	ASTM D5185m		<b>&lt;1</b>	4	4
Zinc	ppm	ASTM D5185m		<b>10</b>	10	6

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>&lt;1</b>	<1	0
Sodium	ppm	ASTM D5185m		<b>4</b>	0	3
Potassium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	1	<1
Water	%	ASTM D6304	>0.05	<b>0.003</b>	0.002	0.009
ppm Water	ppm	ASTM D6304	>500	<b>30</b>	25.0	94.7

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647		<b>---</b>	7672	1757
Particles >6µm		ASTM D7647	>1300	<b>---</b>	▲ 2174	398
Particles >14µm		ASTM D7647	>80	<b>---</b>	▲ 195	41
Particles >21µm		ASTM D7647	>20	<b>---</b>	▲ 49	13
Particles >38µm		ASTM D7647	>4	<b>---</b>	2	1
Particles >71µm		ASTM D7647	>3	<b>---</b>	0	0
Oil Cleanliness		ISO 4406 (c)	>--/17/13	<b>---</b>	▲ 20/18/15	16/13

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.4	<b>0.31</b>	0.24	0.244


# OIL ANALYSIS REPORT

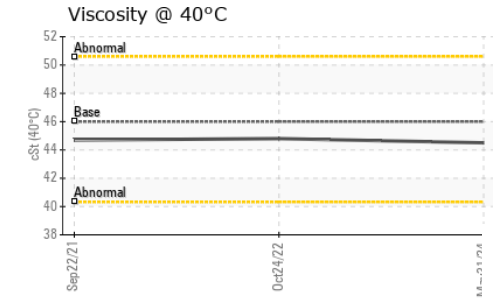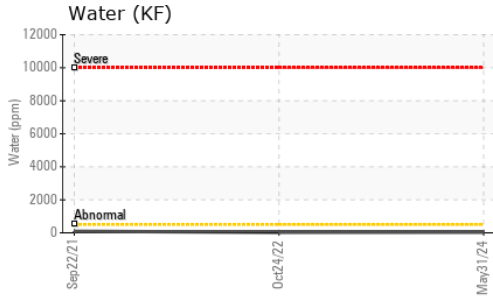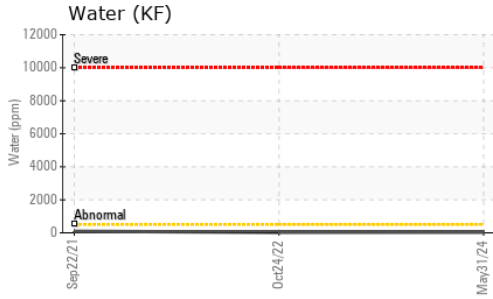





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	▲ MODER	LIGHT
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445 46	44.5	44.8	44.7

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

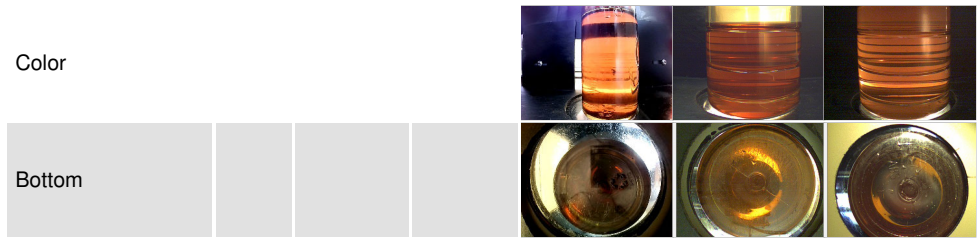

## GRAPHS

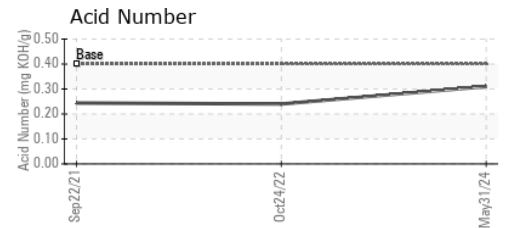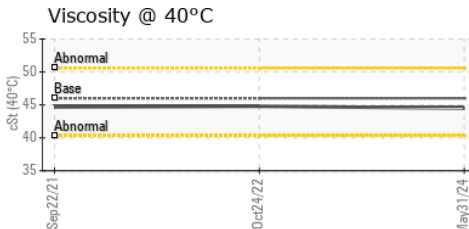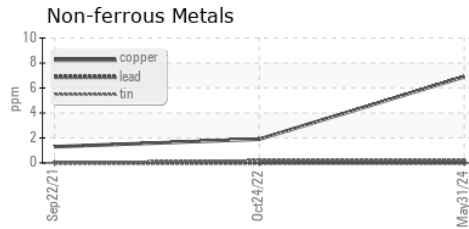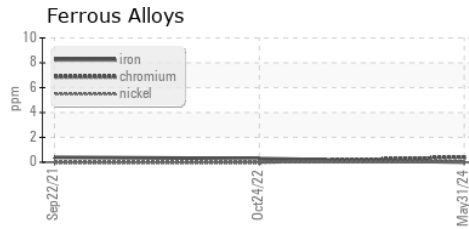

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : KC132063  
**Lab Number** : 06202716  
**Unique Number** : 11070177  
**Test Package** : IND 2

**Received** : 07 Jun 2024  
**Tested** : 10 Jun 2024  
**Diagnosed** : 10 Jun 2024 - Don Baldrige

**EATON ELECTRICAL**  
 1000 CHERRINGTON PKWY  
 MOON TOWNSHIP, PA  
 US 15108  
 Contact: Service Manager

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: