


# **FUEL REPORT**

# QTS SUWANEE DC1 [17730] [QTS SUWANEE DC1] HV DAY 5

**Diesel Fuel** 

No.2 DIESEL FUEL (ULTRALOW SULPHUR)





## DIAGNOSIS

#### Recommendation

All laboratory tests indicate that this sample meets specifications for No.2 ultra-low-sulfur diesel fuel.

#### Corrosion

All metal levels are normal indicating no corrosion in the system.

## Contaminants

There is no bacteria or fungus (yeast and/or mold) indicated in the sample. The water content is negligible. The amount and size of particulates present in the system are acceptable. There is no indication of any contamination in the fuel.

### **Fuel Condition**

Sulfur value derived by ASTM D5453 method for ULSD validation. Sulfur level is acceptable for ULSD specification.

l) (75 GAL)				May2024		
SAMPLE INFORM	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		WC0953826		
Sample Date		Client Info		20 May 2024		
Machine Age	hrs	Client Info		0		
Sample Status				NORMAL		
PHYSICAL PROP	ERTIES	method	limit/base	current	history1	history2
Fuel Color	text	*Visual Screen	Yllow	Red		
ASTM Color	scalar	*ASTM D1500		L4.5		
Visc @ 40°C	cSt	ASTM D445	3.0	2.53		
Pensky-Martens Flash Point	°C	*PMCC Calculated	52	61.4		
SULFUR CONTE	NT	method	limit/base	current	history1	history2
Sulfur	ppm	ASTM D5185m	10	0		
Sulfur (UVF)	ppm	ASTM D5453		10		
DISTILLATION		method	limit/base	current	history1	history2
Initial Boiling Point	°C	ASTM D86	165	172		
5% Distillation Point	°C	ASTM D86		195		
10% Distill Point	°C	ASTM D86	201	205		
15% Distillation Point	°C	ASTM D86		213		
20% Distill Point	°C	ASTM D86	216	221		
30% Distill Point	°C	ASTM D86	230	236		
40% Distill Point	°C	ASTM D86	243	249		
50% Distill Point	°C	ASTM D86	255	262		
60% Distill Point	°C	ASTM D86	267	276		
70% Distill Point	°C	ASTM D86	280	289		
80% Distill Point	°C	ASTM D86	295	304		
85% Distillation Point	°C	ASTM D86		315		
90% Distill Point	°C	ASTM D86	310	325		
95% Distillation Point	°C	ASTM D86	010	343		
Final Boiling Point	°C	ASTM D86	341	359		
IGNITION QUALI	ГҮ	method	limit/base	current	history1	history2
API Gravity		ASTM D7777	37.7	36		
Cetane Index		ASTM D4737	<40.0	48		
CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	<1.0	<1		
Sodium	ppm	ASTM D5185m	<0.1	1		
Potassium	ppm	ASTM D5185m	<0.1	2		
Water	%	ASTM D6304	< 0.05	0.003		
opm Water	ppm	ASTM D6304	<500	27		
% Gasoline	%	*In-House	< 0.50	0.0		
% Diadiasal	0/	*! ! !	-20.0	0.0		


\*In-House <20.0

0.0

% Biodiesel



# **FUEL REPORT**

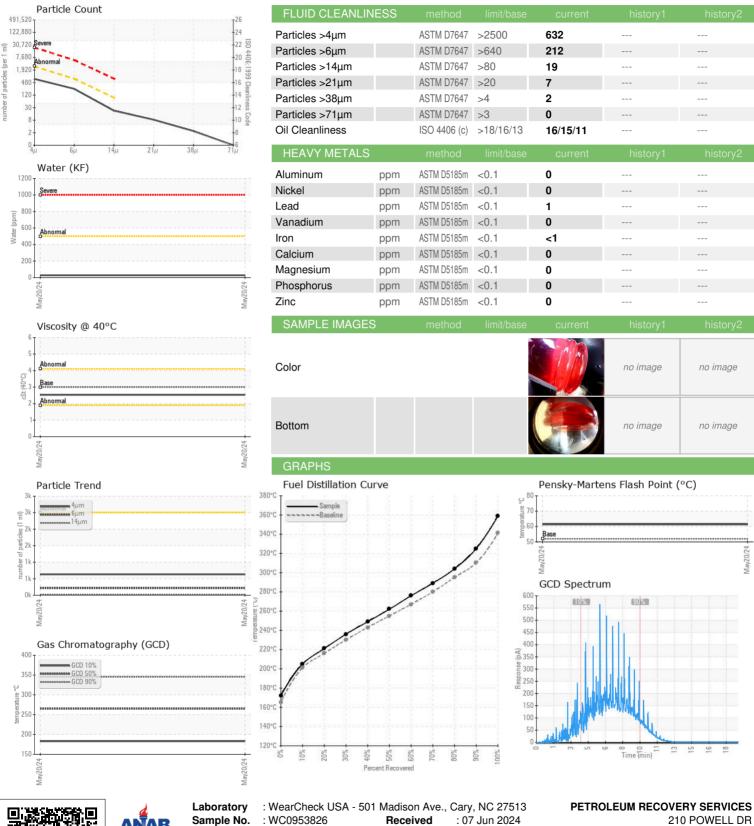





Certificate 12367

Sample No.

Lab Number : 06204062 Unique Number : 11071523

: WC0953826

**Tested** Diagnosed

: 14 Jun 2024

: 14 Jun 2024 - Elizabeth Valachovic Test Package : DF-2 (Additional Tests: Fuel, Screen)

To discuss this sample report, contact Customer Service at 1-800-237-1369. \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

US 29483

SUMMERVILLE, SC

Contact: AJAY EL

Ajay@prsfuel.com

T: (843)225-1777