




# OIL ANALYSIS REPORT

Sample Rating Trend

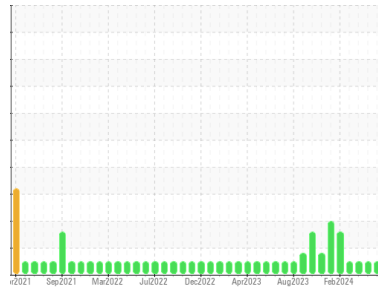

**NORMAL**



Machine Id  
**VESSEL 4 PUMP 2 (S/N B44044)**

Component  
**Hydraulic System**

Fluid  
**PETRO CANADA PURITY FG AW HYDRAULIC 46 (90 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>WC0929990</b>	WC0802556	WC0916594
Sample Date	Client Info	<b>28 May 2024</b>	06 May 2024	31 Mar 2024
Machine Age	hrs	Client Info	<b>0</b>	0
Oil Age	hrs	Client Info	<b>0</b>	0
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >20	<b>0</b>	0	0
Chromium	ppm	ASTM D5185m >20	<b>0</b>	0	0
Nickel	ppm	ASTM D5185m >20	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	0
Lead	ppm	ASTM D5185m >20	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >20	<b>1</b>	0	0
Tin	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	<b>0</b>	0	0
Barium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>0</b>	0	0
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm	ASTM D5185m	<b>0</b>	2	0
Calcium	ppm	ASTM D5185m	<b>10</b>	3	0
Phosphorus	ppm	ASTM D5185m	<b>423</b>	443	461
Zinc	ppm	ASTM D5185m	<b>5</b>	0	0
Sulfur	ppm	ASTM D5185m	<b>586</b>	607	584

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >15	<b>4</b>	3	3
Sodium	ppm	ASTM D5185m	<b>2</b>	<1	1
Potassium	ppm	ASTM D5185m >20	<b>2</b>	2	2
Water	%	ASTM D6304 >0.05	<b>0.032</b>	0.00	0.001
ppm Water	ppm	ASTM D6304 >500	<b>320</b>	0	9

## FLUID CLEANLINESS






method	limit/base	current	history1	history2
Particles >4µm	ASTM D7647 >10000	<b>3939</b>	2120	2969
Particles >6µm	ASTM D7647 >1300	<b>954</b>	469	825
Particles >14µm	ASTM D7647 >160	<b>66</b>	13	75
Particles >21µm	ASTM D7647 >40	<b>12</b>	1	24
Particles >38µm	ASTM D7647 >10	<b>1</b>	0	1
Particles >71µm	ASTM D7647 >3	<b>0</b>	0	0
Oil Cleanliness	ISO 4406 (c) >20/17/14	<b>19/17/13</b>	18/16/11	19/17/13

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Acid Number (AN)	mg KOH/g	ASTM D8045 0.26	<b>0.17</b>	0.23	0.23




# OIL ANALYSIS REPORT

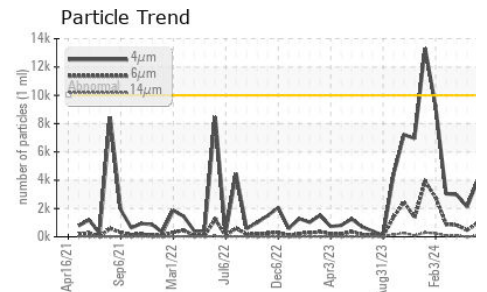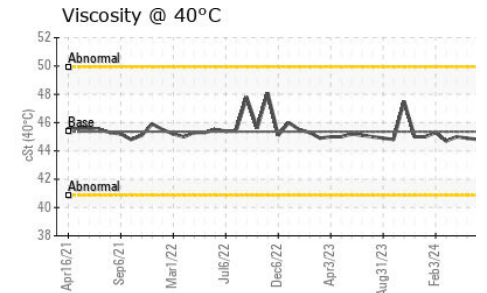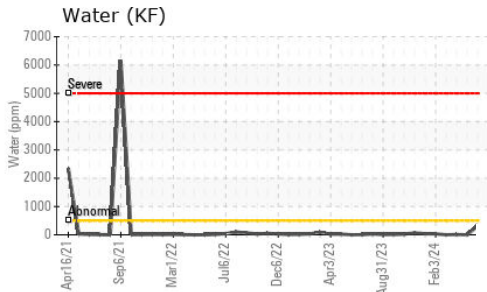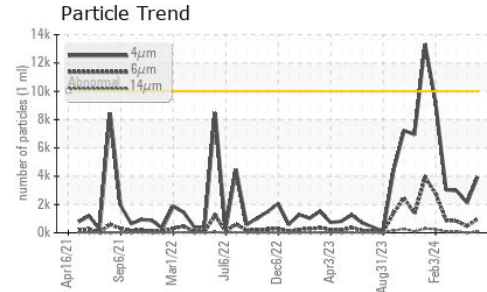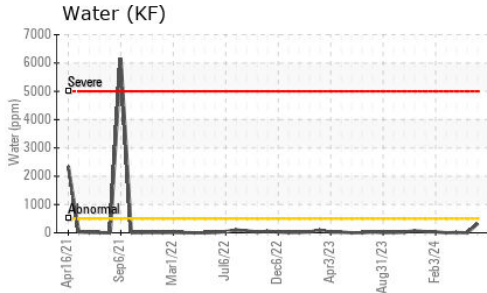






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	45.36	44.8	44.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

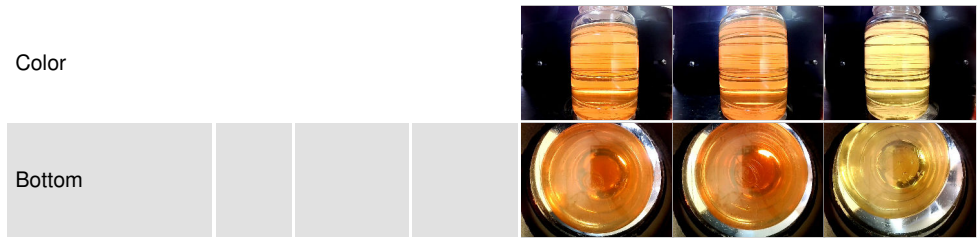

## GRAPHS

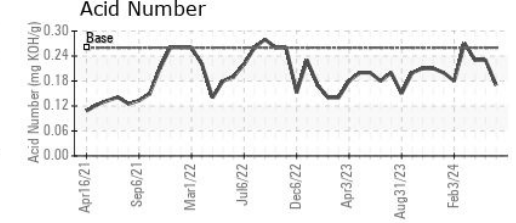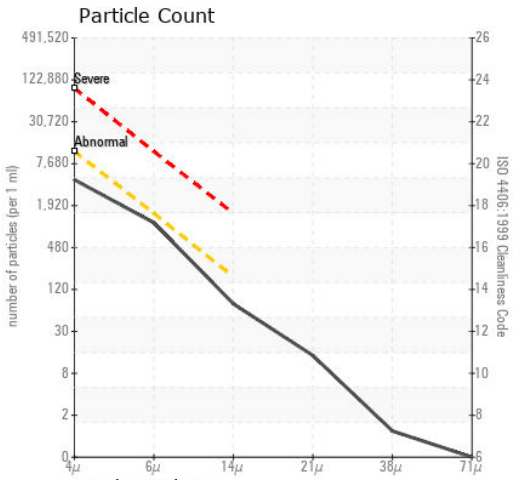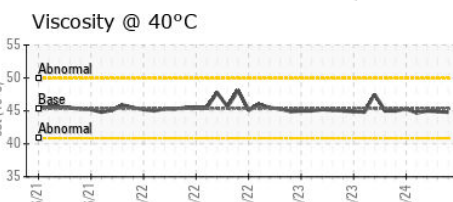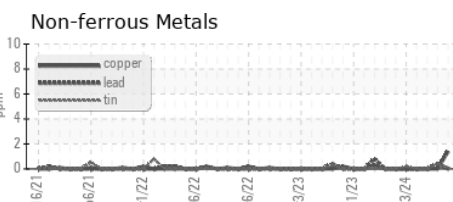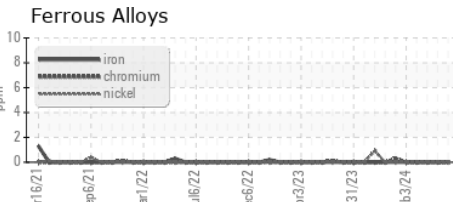

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : WC0929990 **Received** : 10 Jun 2024  
**Lab Number** : 06204644 **Tested** : 12 Jun 2024  
**Unique Number** : 11072105 **Diagnosed** : 12 Jun 2024 - Wes Davis  
**Test Package** : IND 2 ( Additional Tests: KF )

**OSCEOLA FOODS (HORMEL)**  
 1027 WARREN AVE  
 OSCEOLA, IA  
 US 50213  
 Contact: WADE MYERS  
 wlmyers@hormel.com  
 T: (641)342-8043  
 F: (641)342-8047

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)