




OIL ANALYSIS REPORT



Machine Id
Grand River CAT 1 GRRM01BE
 Component
Biogas Engine
 Fluid
CHEVRON HDAX 9500 GAS ENGINE OIL 40 (90 GAL)

Sample Rating Trend

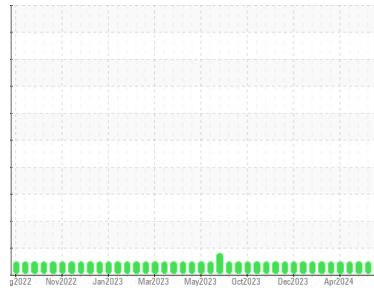

NORMAL



DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		WC0934189	WC0934197	WC0934188
Sample Date	Client Info		07 Jun 2024	28 May 2024	17 May 2024
Machine Age	hrs	Client Info	73154	73032	72769
Oil Age	hrs	Client Info	596	474	211
Oil Changed	Client Info		Not Chngd	Not Chngd	Not Chngd
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>4.0	<1.0	<1.0	<1.0
Water	WC Method	>.11	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >15	2	0	2
Chromium	ppm	ASTM D5185m >4	<1	0	<1
Nickel	ppm	ASTM D5185m	0	0	<1
Titanium	ppm	ASTM D5185m	<1	0	<1
Silver	ppm	ASTM D5185m	0	0	<1
Aluminum	ppm	ASTM D5185m >6	2	1	2
Lead	ppm	ASTM D5185m >9	<1	0	1
Copper	ppm	ASTM D5185m >6	1	<1	3
Tin	ppm	ASTM D5185m >4	<1	<1	2
Vanadium	ppm	ASTM D5185m	0	0	<1
Cadmium	ppm	ASTM D5185m	<1	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	9	10	14
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	3	2	4
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m	14	15	14
Calcium	ppm	ASTM D5185m	1745	1733	1682
Phosphorus	ppm	ASTM D5185m	273	295	302
Zinc	ppm	ASTM D5185m	351	341	343
Sulfur	ppm	ASTM D5185m	1954	2013	2168

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >181	30	27	24
Sodium	ppm	ASTM D5185m >21	0	<1	0
Potassium	ppm	ASTM D5185m >20	2	0	3

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0	0	0
Nitration	Abs/cm	*ASTM D7624	6.8	6.5	5.7
Sulfation	Abs/.1mm	*ASTM D7415	16.2	15.8	15.1


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	11.4	10.7	8.9
Acid Number (AN)	mg KOH/g	ASTM D8045 1.0	1.00	1.49	0.24
Base Number (BN)	mg KOH/g	ASTM D2896 5.4	3.83	4.46	4.84




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

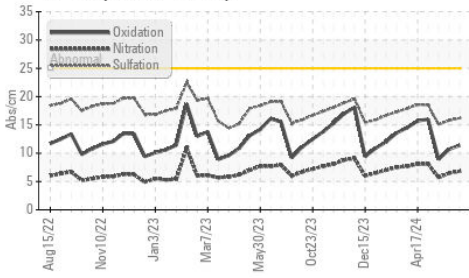


Acid Number

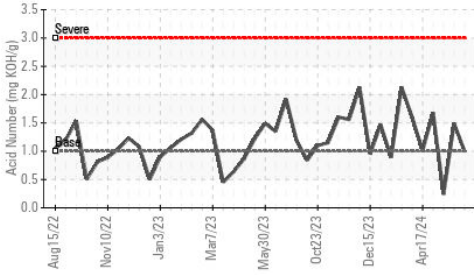

Base Number

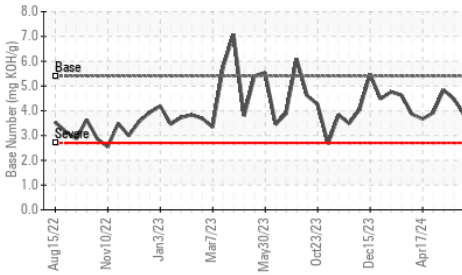









Viscosity @ 100°C

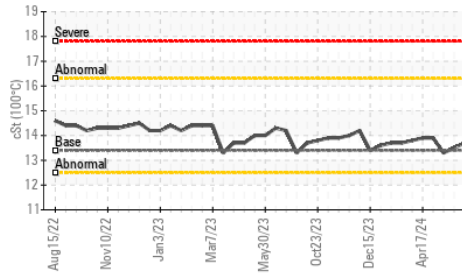

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>.11	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	13.4	13.7	13.5

GRAPHS

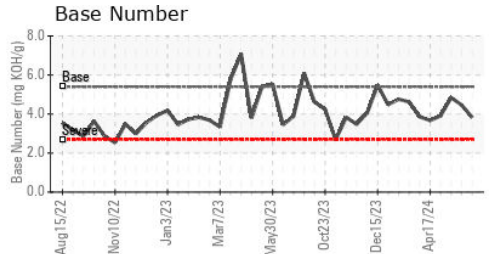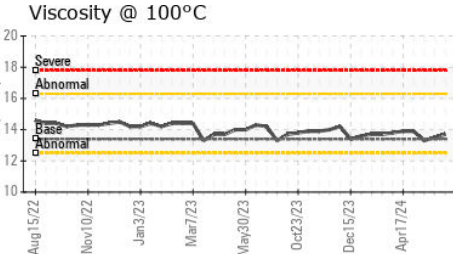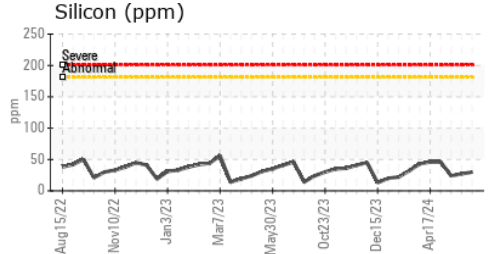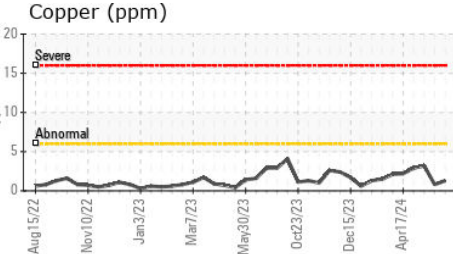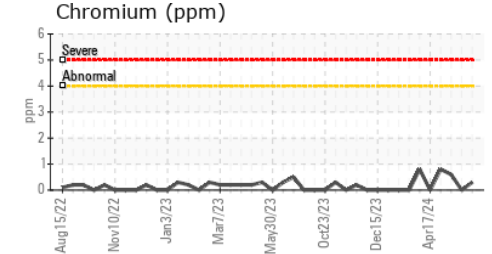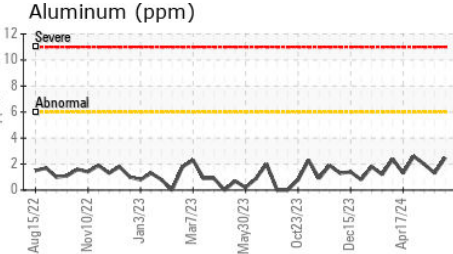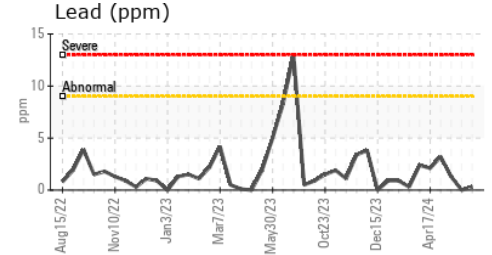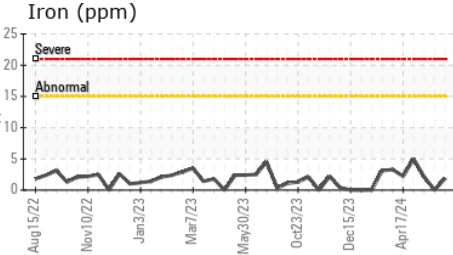

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : WC0934189
 Lab Number : 06206739
 Unique Number : 11074200
 Test Package : MOB 2

Received : 11 Jun 2024
 Tested : 13 Jun 2024
 Diagnosed : 13 Jun 2024 - Sean Felton

EDL NA Recips-Grand River
 Grand River Powerstation, 8550 West Grand River Hwy
 Grand Ledge, MI
 US 48837
 Contact: JAMES ALEXANDER
 james.alexander@edlenergy.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: