




OIL ANALYSIS REPORT

Sample Rating Trend

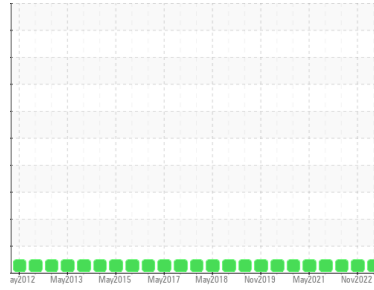

NORMAL



Area
[BOSTON]
 Machine Id
ALSTOM R061
 Component
Gearbox
 Fluid
TOTAL CARTER SH 220 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0798744	WC0643800	WC0643830
Sample Date	Client Info			17 May 2024	15 Nov 2022	13 May 2022
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	Not Changd	N/A
Sample Status				NORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.2	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>200	76	161	170
Chromium	ppm	ASTM D5185m	>10	0	<1	1
Nickel	ppm	ASTM D5185m	>10	0	0	0
Titanium	ppm	ASTM D5185m		0	<1	<1
Silver	ppm	ASTM D5185m		0	2	0
Aluminum	ppm	ASTM D5185m	>25	<1	4	4
Lead	ppm	ASTM D5185m	>50	2	7	6
Copper	ppm	ASTM D5185m	>200	43	100	93
Tin	ppm	ASTM D5185m	>10	0	<1	<1
Antimony	ppm	ASTM D5185m	>5	---	---	---
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0



ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	2	2
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		0	<1	0
Manganese	ppm	ASTM D5185m		<1	2	2
Magnesium	ppm	ASTM D5185m		0	2	1
Calcium	ppm	ASTM D5185m		9	8	10
Phosphorus	ppm	ASTM D5185m		327	370	416
Zinc	ppm	ASTM D5185m		83	161	153
Sulfur	ppm	ASTM D5185m		4404	3708	3208

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>50	11	17	17
Sodium	ppm	ASTM D5185m		26	39	42
Potassium	ppm	ASTM D5185m	>20	<1	2	1

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		0.37	0.49	0.62



OIL ANALYSIS REPORT







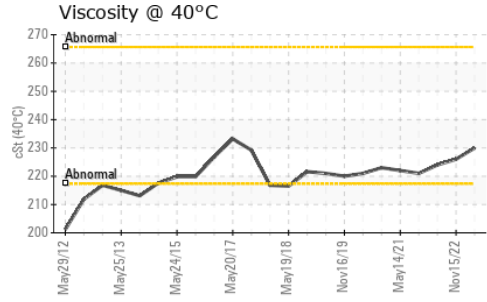
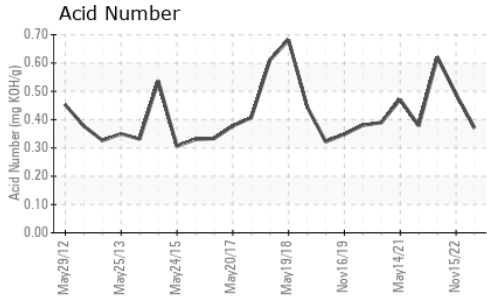


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	230	226	224

SAMPLE IMAGES	method	limit/base	current	history1	history2
Color				no image	no image
Bottom				no image	no image

GRAPHS

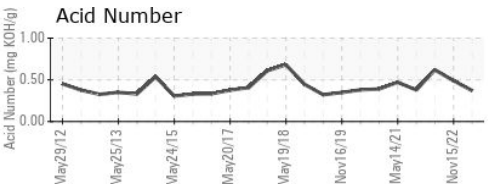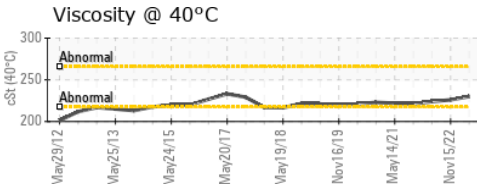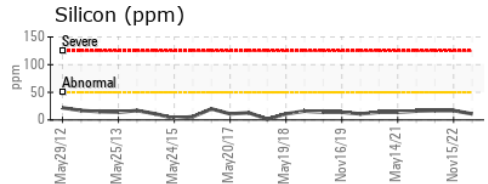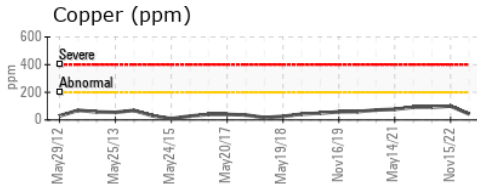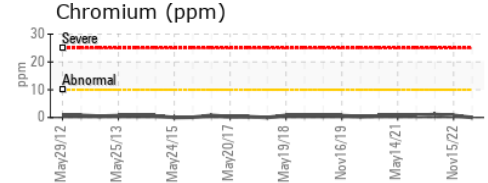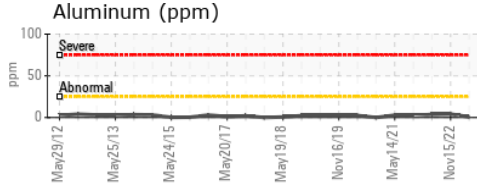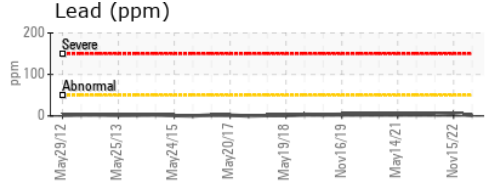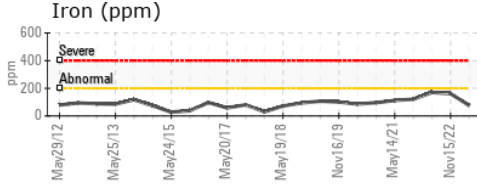

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0798744
Lab Number : **06207149**
Unique Number : 11074610
Test Package : MOB 2

Received : 11 Jun 2024
Tested : 13 Jun 2024
Diagnosed : 13 Jun 2024 - Wes Davis

AMTRAK
 1401 W STREET NE, HIGH SPEED RAIL 2ND FLOOR
 WASHINGTON, DC
 US 20018
 Contact: MICHAEL PORTER
 michael.porter@amtrak.com
 T: (202)870-1399
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)