




OIL ANALYSIS REPORT

Sample Rating Trend

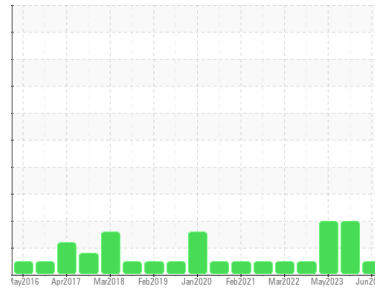

NORMAL



Area

East Molding
Machine Id
526 (S/N 36588)

Component

Hydraulic System

Fluid

AW HYDRAULIC OIL ISO 46 (420 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			RP0043254	RP0035821	RP0029222
Sample Date	Client Info			08 Jun 2024	28 Nov 2023	03 May 2023
Machine Age	hrs	Client Info		0	0	0
Oil Age	hrs	Client Info		0	0	0
Oil Changed	Client Info			N/A	N/A	N/A
Sample Status				NORMAL	ABNORMAL	ABNORMAL

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	8	3	3
Chromium	ppm	ASTM D5185m	>20	0	0	0
Nickel	ppm	ASTM D5185m	>20	0	0	0
Titanium	ppm	ASTM D5185m		0	0	<1
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	<1	0	0
Lead	ppm	ASTM D5185m	>20	6	6	10
Copper	ppm	ASTM D5185m	>20	10	14	11
Tin	ppm	ASTM D5185m	>20	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		0	0	0






ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	5	0	0	0
Barium	ppm	ASTM D5185m	5	0	0	0
Molybdenum	ppm	ASTM D5185m	5	1	0	<1
Manganese	ppm	ASTM D5185m		<1	0	<1
Magnesium	ppm	ASTM D5185m	25	4	<1	5
Calcium	ppm	ASTM D5185m	200	52	51	55
Phosphorus	ppm	ASTM D5185m	300	348	326	356
Zinc	ppm	ASTM D5185m	370	384	357	432

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	9
Sodium	ppm	ASTM D5185m		5	4	0
Potassium	ppm	ASTM D5185m	>20	2	0	2
Water	%	ASTM D6304	>0.05	0.007	0.012	0.003
ppm Water	ppm	ASTM D6304	>500	77	121	33.4

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2889	▲ 15504	▲ 20558
Particles >6µm		ASTM D7647	>1300	826	▲ 5126	▲ 5062
Particles >14µm		ASTM D7647	>160	94	▲ 531	▲ 258
Particles >21µm		ASTM D7647	>40	28	▲ 123	▲ 41
Particles >38µm		ASTM D7647	>10	2	5	2
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>19/17/14	19/17/14	▲ 21/20/16	▲ 22/20/15

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.57	0.46	0.41	0.38


OIL ANALYSIS REPORT

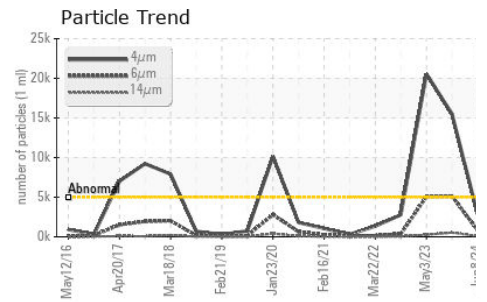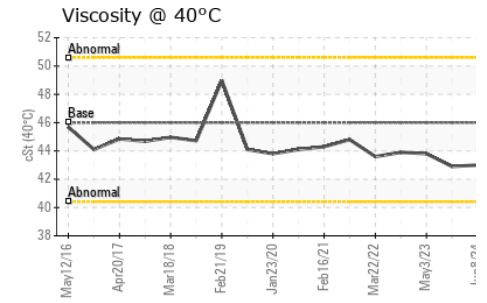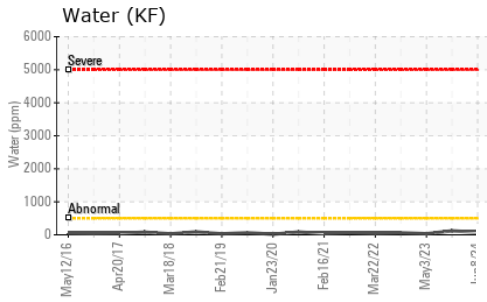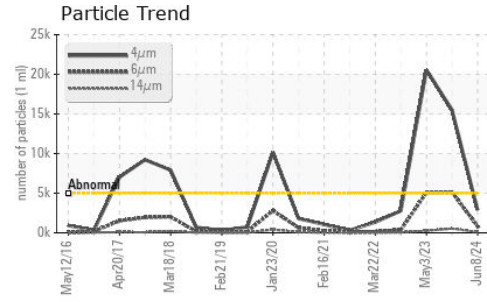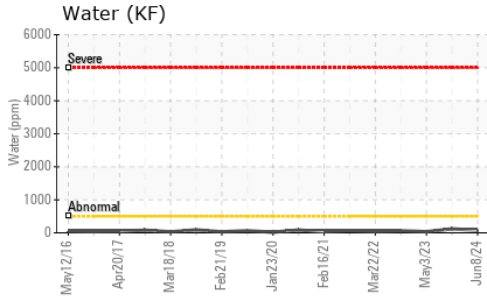





VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	46	43.0	42.9

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

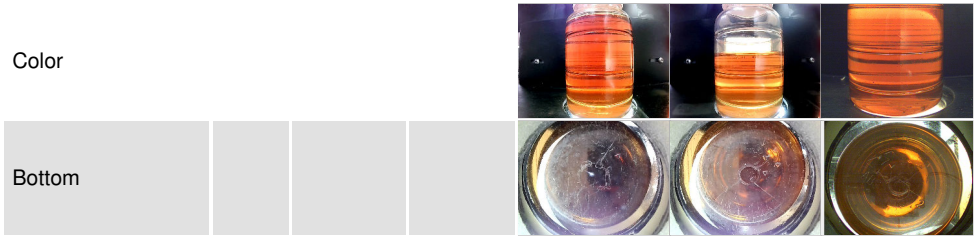

GRAPHS

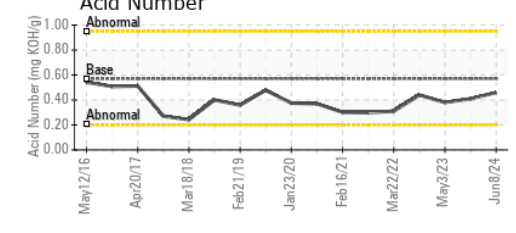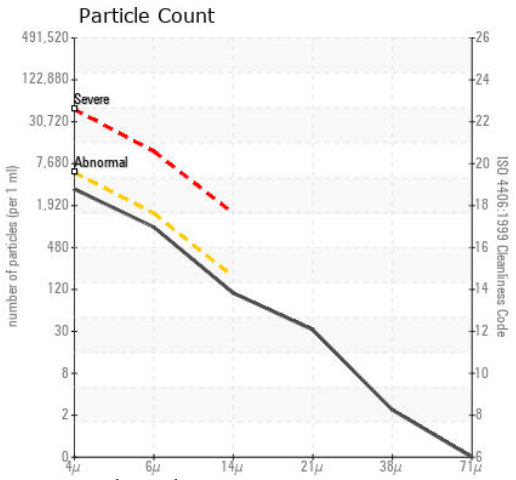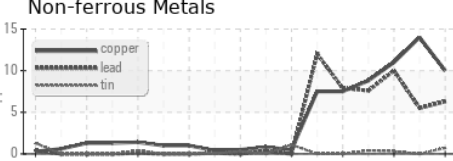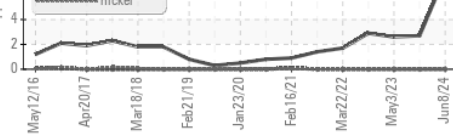

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : RP0043254
Lab Number : 06208284
Unique Number : 11075745
Test Package : IND 2
Received : 12 Jun 2024
Tested : 13 Jun 2024
Diagnosed : 13 Jun 2024 - Wes Davis

YANFENG AUTOMOTIVE INTERIORS
 1600 S. WASHINGTON AVE.
 HOLLAND, MI
 US 49423
 Contact: JEFF HARRIS
 jeffrey.harris@yanfeng.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)