




OIL ANALYSIS REPORT

Sample Rating Trend

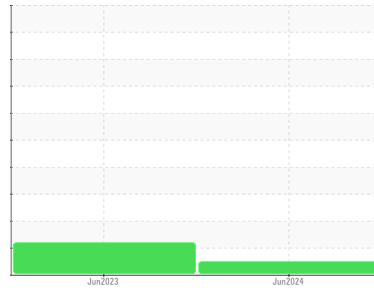

NORMAL



Area

[1363]

Machine Id

CRAMALOT E15585 C18530-01 - SILGAN

Component

Hydraulic System

Fluid

{not provided} (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The amount and size of particulates present in the system are acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0911551	WC0810210	---
Sample Date	Client Info			11 Jun 2024	07 Jun 2023	---
Machine Age	hrs	Client Info		0	0	---
Oil Age	hrs	Client Info		0	0	---
Oil Changed	Client Info			Filtered	Filtered	---
Sample Status				NORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.1	NEG	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	2	<1	---
Chromium	ppm	ASTM D5185m	>10	<1	<1	---
Nickel	ppm	ASTM D5185m	>10	0	0	---
Titanium	ppm	ASTM D5185m		<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>10	2	0	---
Lead	ppm	ASTM D5185m	>10	0	0	---
Copper	ppm	ASTM D5185m	>75	18	0	---
Tin	ppm	ASTM D5185m	>10	0	0	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---





ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m		0	1	---
Barium	ppm	ASTM D5185m		2	0	---
Molybdenum	ppm	ASTM D5185m		0	0	---
Manganese	ppm	ASTM D5185m		0	0	---
Magnesium	ppm	ASTM D5185m		1	91	---
Calcium	ppm	ASTM D5185m		132	183	---
Phosphorus	ppm	ASTM D5185m		482	367	---
Zinc	ppm	ASTM D5185m		711	457	---
Sulfur	ppm	ASTM D5185m		4458	1515	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>20	2	<1	---
Sodium	ppm	ASTM D5185m		0	2	---
Potassium	ppm	ASTM D5185m	>20	1	0	---

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>5000	2065	▲ 18230	---
Particles >6µm		ASTM D7647	>1300	529	● 2384	---
Particles >14µm		ASTM D7647	>160	33	76	---
Particles >21µm		ASTM D7647	>40	5	18	---
Particles >38µm		ASTM D7647	>10	0	1	---
Particles >71µm		ASTM D7647	>3	0	0	---
Oil Cleanliness		ISO 4406 (c)	>19/17/14	18/16/12	▲ 21/18/13	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045		1.233	0.37	---


OIL ANALYSIS REPORT

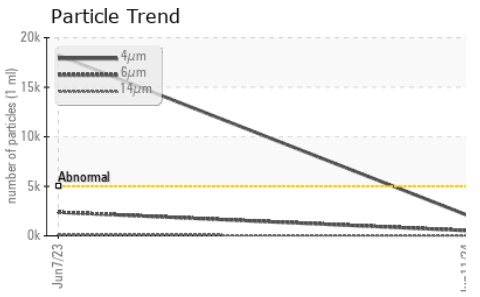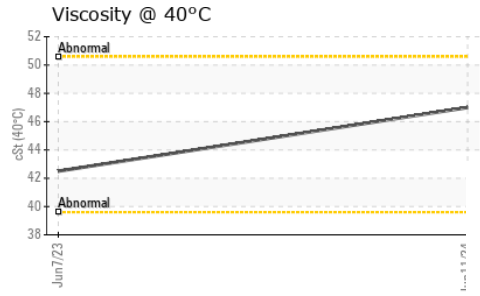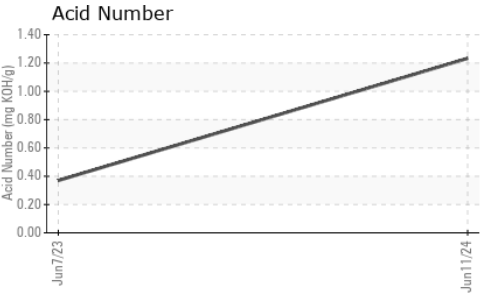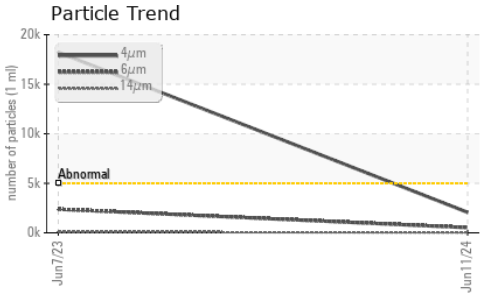






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	LIGHT	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.1	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	47.0	42.5	---

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

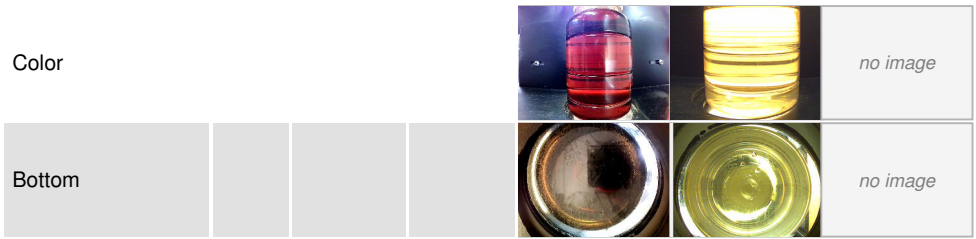

GRAPHS

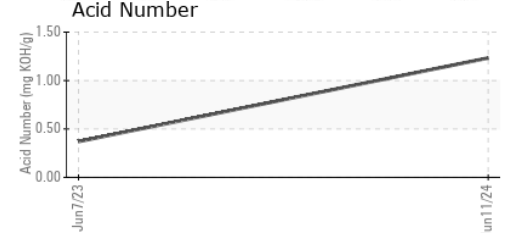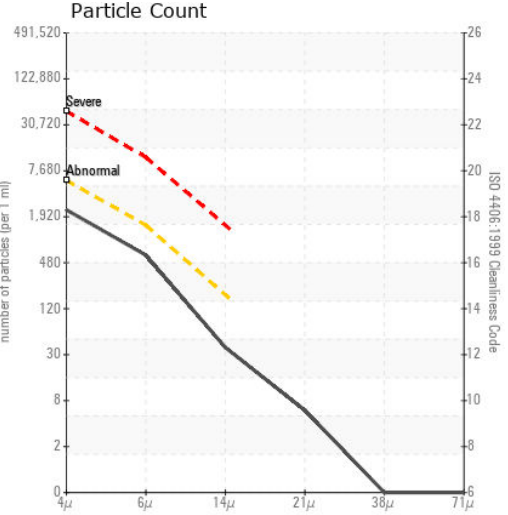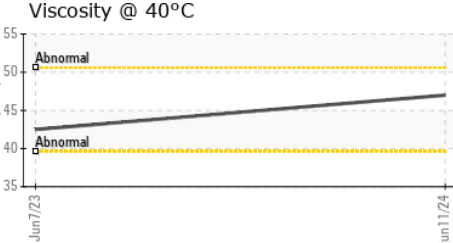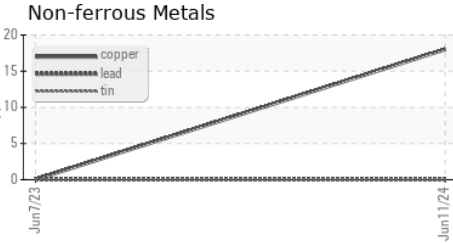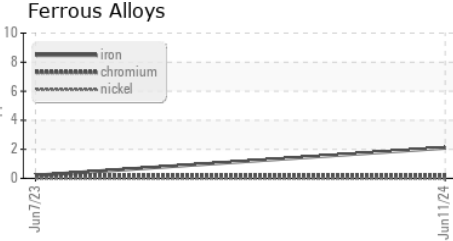

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0911551 **Received** : 14 Jun 2024
Lab Number : **06210715** **Tested** : 18 Jun 2024
Unique Number : 11083579 **Diagnosed** : 18 Jun 2024 - Angela Borella
Test Package : IND 2

ADVANCED EQUIPMENT SALES
 535 HAGEY RD
 SOUDERTON, PA
 US 18964
 Contact: JEFF BURNLEY
 jburnley@aesales.net
 T: (215)723-7200
 F: (215)723-7201

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)