




# OIL ANALYSIS REPORT

Sample Rating Trend

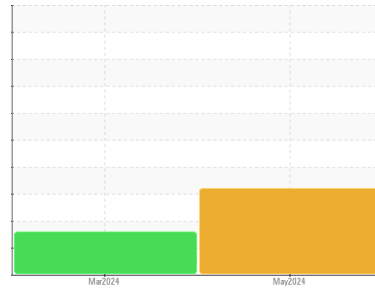

DIRT



Machine Id

## PETERBILT 772

Component

### Diesel Engine

Fluid

### PETRO CANADA DURON SHP 15W40 (--- GAL)

#### DIAGNOSIS

##### ▲ Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

##### ▲ Wear

The copper level is abnormal. Valve wear is indicated. Elemental level of copper (Cu) probably due to leaching of copper from copper components (i.e. cooling core) by the oil additives.

##### ▲ Contamination

Elemental level of silicon (Si) above normal.

##### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			<b>SBP0005976</b>	SBP0005814	---
Sample Date	Client Info			<b>11 May 2024</b>	03 Mar 2024	---
Machine Age	mls	Client Info		<b>571771</b>	542079	---
Oil Age	mls	Client Info		<b>29692</b>	31736	---
Oil Changed	Client Info			<b>Changed</b>	Changed	---
Sample Status				<b>ABNORMAL</b>	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>5		<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2		<b>NEG</b>	NEG	---
Glycol	WC Method			<b>NEG</b>	NEG	---

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	<b>63</b>	21	---
Chromium	ppm	ASTM D5185m	>20	<b>5</b>	2	---
Nickel	ppm	ASTM D5185m	>2	<b>▲ 5</b>	<1	---
Titanium	ppm	ASTM D5185m	>2	<b>0</b>	<1	---
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m	>25	<b>3</b>	2	---
Lead	ppm	ASTM D5185m	>40	<b>2</b>	2	---
Copper	ppm	ASTM D5185m	>330	<b>▲ 262</b>	23	---
Tin	ppm	ASTM D5185m	>15	<b>3</b>	2	---
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<b>2</b>	2	---
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	---
Molybdenum	ppm	ASTM D5185m	60	<b>64</b>	63	---
Manganese	ppm	ASTM D5185m	0	<b>1</b>	2	---
Magnesium	ppm	ASTM D5185m	1010	<b>1022</b>	945	---
Calcium	ppm	ASTM D5185m	1070	<b>1149</b>	1225	---
Phosphorus	ppm	ASTM D5185m	1150	<b>884</b>	1063	---
Zinc	ppm	ASTM D5185m	1270	<b>1209</b>	1303	---
Sulfur	ppm	ASTM D5185m	2060	<b>2547</b>	3446	---






CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	<b>▲ 29</b>	<b>▲ 35</b>	---
Sodium	ppm	ASTM D5185m		<b>3</b>	2	---
Potassium	ppm	ASTM D5185m	>20	<b>3</b>	0	---

INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.2	---
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.4</b>	6.3	---
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>21.0</b>	18.9	---

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>18.6</b>	14.3	---
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>6.6</b>	9.4	---







# OIL ANALYSIS REPORT

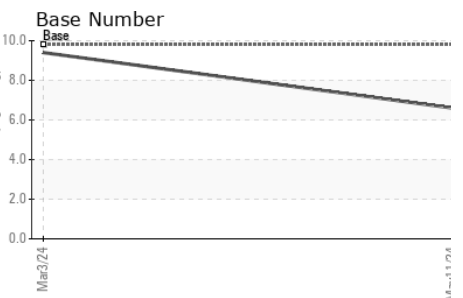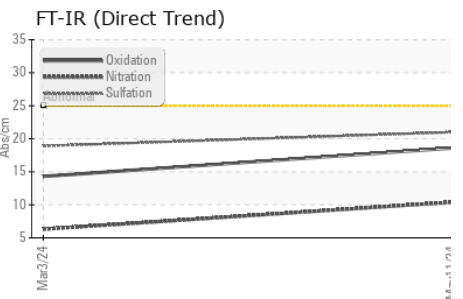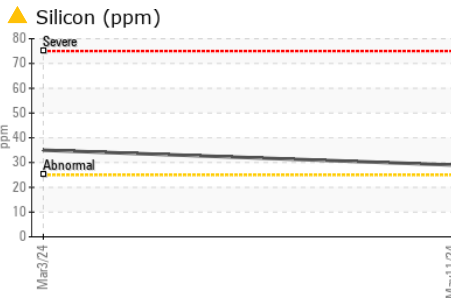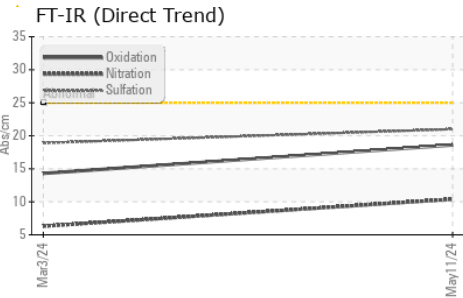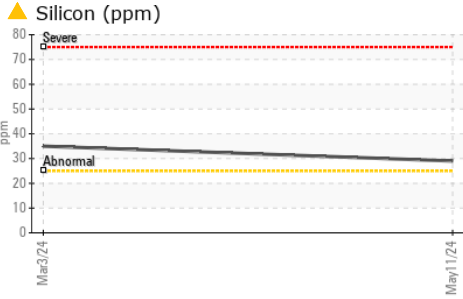

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Yellow Metal	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Sand/Dirt	scalar	*Visual	NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual	NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual	>0.2	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual		<b>NEG</b>	NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.6</b>	13.5	---

## GRAPHS

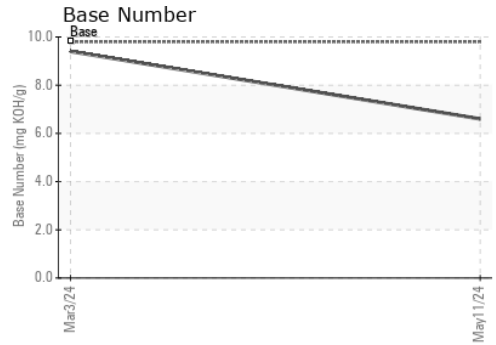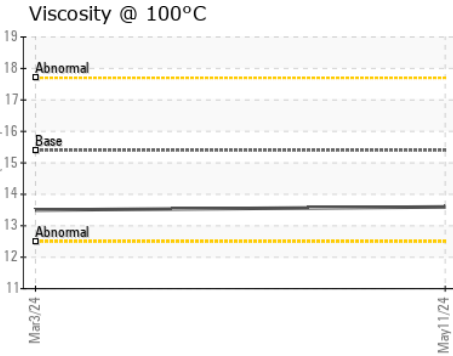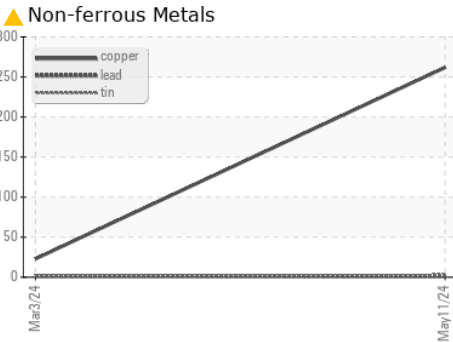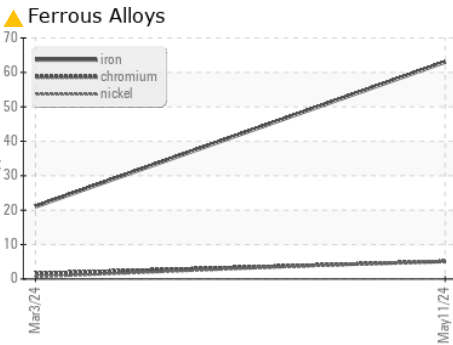

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : SBP0005976  
**Lab Number** : 06220562  
**Unique Number** : 11098759  
**Test Package** : FLEET

**Received** : 25 Jun 2024  
**Tested** : 26 Jun 2024  
**Diagnosed** : 27 Jun 2024 - Don Baldrige

**TC TRUCKING LLC - TODD CROME**  
 330 GRANITE RD  
 BREMEN, KS  
 US 66412  
 Contact: TRACEY CHROME  
 tandcrome@diodecom.net

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: