




OIL ANALYSIS REPORT

Sample Rating Trend

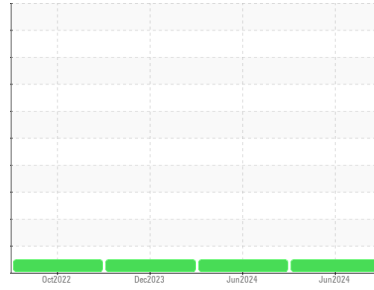

NORMAL



Machine Id
FFS CAE 30S1
 Component
Hydraulic System
 Fluid
SHELL TELLUS 46 (400 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The system and fluid cleanliness is acceptable.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			WC0822544	WC0822543	WC0822533
Sample Date	Client Info			14 Jun 2024	01 Jun 2024	21 Dec 2023
Machine Age	yrs	Client Info		0	0	20
Oil Age	yrs	Client Info		3	0	3
Oil Changed	Client Info			Filtered	N/A	Filtered
Sample Status				NORMAL	---	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>0.05	NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>20	<1	0	0
Chromium	ppm	ASTM D5185m	>20	<1	<1	0
Nickel	ppm	ASTM D5185m	>20	<1	<1	0
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m		0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	2	0
Lead	ppm	ASTM D5185m	>20	6	14	4
Copper	ppm	ASTM D5185m	>20	2	1	<1
Tin	ppm	ASTM D5185m	>20	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		<1	<1	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0.0	0	0	0
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	0	8	<1	7
Manganese	ppm	ASTM D5185m		0	0	0
Magnesium	ppm	ASTM D5185m	11	9	13	2
Calcium	ppm	ASTM D5185m	35	14	6	24
Phosphorus	ppm	ASTM D5185m	266	271	256	222
Zinc	ppm	ASTM D5185m	276	352	347	281
Sulfur	ppm	ASTM D5185m	1847	679	767	569





CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>15	<1	<1	0
Sodium	ppm	ASTM D5185m		0	0	2
Potassium	ppm	ASTM D5185m	>20	1	<1	0

FLUID CLEANLINESS		method	limit/base	current	history1	history2
Particles >4µm		ASTM D7647	>640	126	70	58
Particles >6µm		ASTM D7647	>160	39	34	19
Particles >14µm		ASTM D7647	>20	7	9	5
Particles >21µm		ASTM D7647	>4	1	3	2
Particles >38µm		ASTM D7647	>3	0	0	0
Particles >71µm		ASTM D7647	>3	0	0	0
Oil Cleanliness		ISO 4406 (c)	>16/14/11	14/12/10	13/12/10	13/11/10

FLUID DEGRADATION		method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	0.36	0.29	0.30	0.30




OIL ANALYSIS REPORT

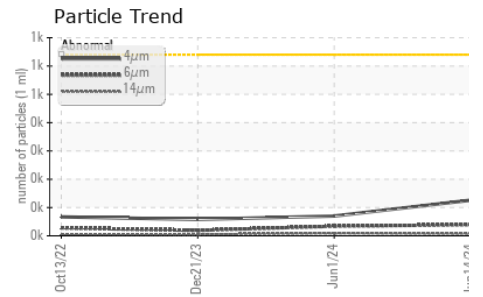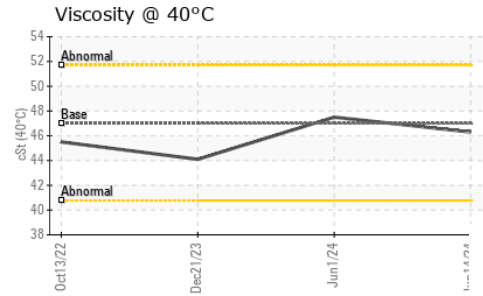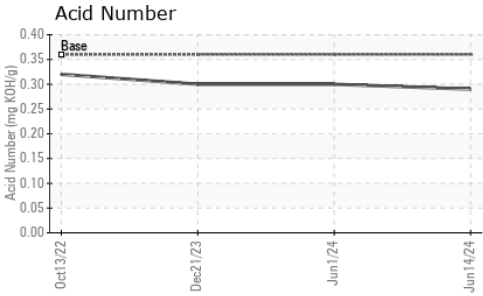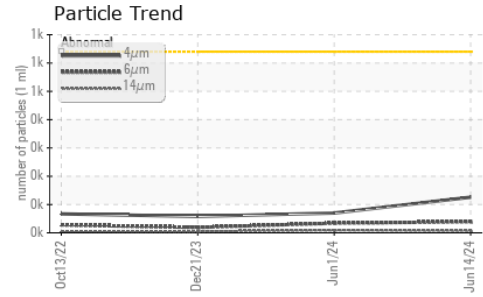






VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	LIGHT
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.05	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	46.99	46.3	47.5	44.1

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

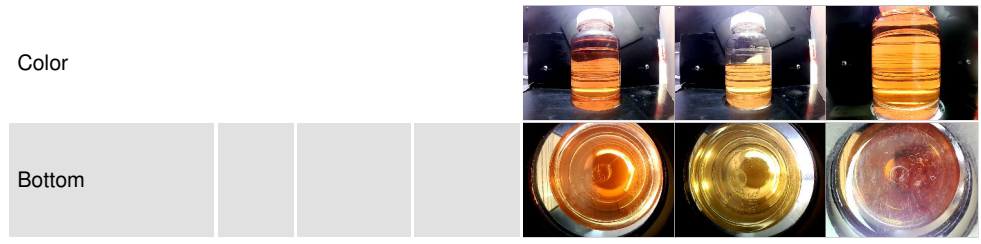

GRAPHS

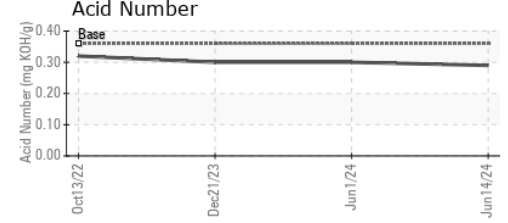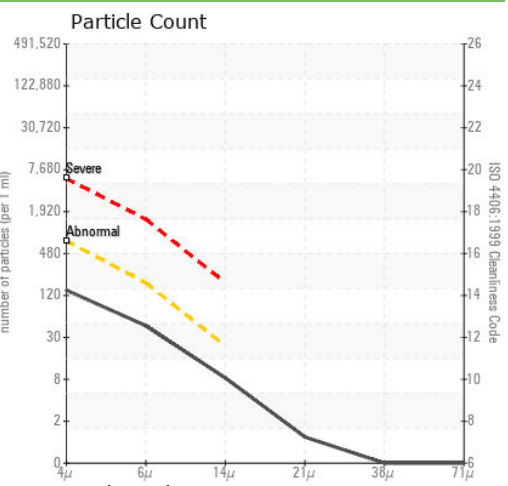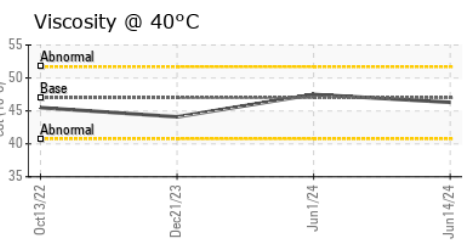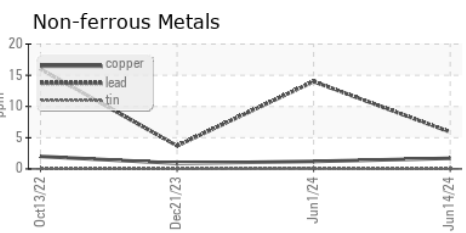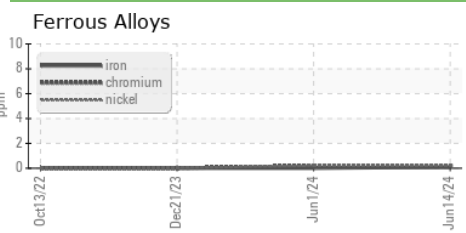

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : WC0822544 **Received** : 15 Jul 2024
Lab Number : 06235895 **Tested** : 16 Jul 2024
Unique Number : 11124729 **Diagnosed** : 16 Jul 2024 - Wes Davis
Test Package : IND 2

AIR DRAULICS ENGINEERING
 4250 PILOT DRIVE
 MEMPHIS, TN
 US 38118
 Contact: BEN STRAFUSS
 BENSTRAFUSS@AIRDRAULIC.COM

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)