




# RAPPORT DU CARBURANT

Sample Rating Trend

NORMALE

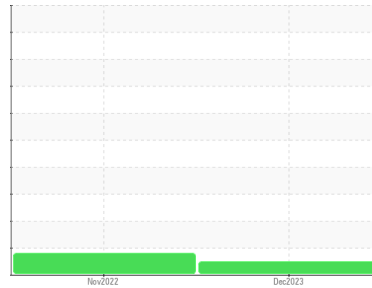

Identité de la machine

**TILLEY**

Composant

**Carburant diesel**

Fluid

**No.2 DIESEL FUEL (LOW-SULPHUR) (--- GAL)**

## DIAGNOSTIC

### Recommendation

Laboratory test indicate that this fuel is suitable for use and meets all test requirements. Resample at the next service interval to monitor.

### Corrossione

{not applicable}

### Contaminants

The system cleanliness is acceptable for your target ISO 4406 cleanliness code. The water content is negligible. There is no indication of any contamination in the diesel fuel.

### État Du Carburant

All laboratory tests indicate that this sample meets specifications for No.2 diesel fuel, low sulfur (US EPA/CGSB-3.517-3 type B).

INFORMATION SUR L'ÉCHANTILLON		methode	limite/base	actuel	passé1	passé2
Numéro d'échant.	Client Info			<b>CU0019834</b>	CU0019859	---
Date d'échant.	Client Info			<b>18 Dec 2023</b>	22 Nov 2022	---
Âge d la Machine	hrs	Client Info		<b>0</b>	350	---
Statut de l'échant.				<b>NORMAL</b>	ATTENTION	---

PHYSICAL PROPERTIES		methode	limite/base	actuel	passé1	passé2
Densité		ASTM D1298*	0.839	<b>0.833</b>	0.825	---
Couleur du carburant	text	Visual Screen*	Yllow	<b>Pink</b>	Red	---
Visc 40°C	cSt	ASTM D7279(m)	3.0	<b>2.3</b>	2.3	---
Point d'éclair Pensky-Martens	°C	ASTM D7215*	52	<b>55</b>	56.1	---

SULFUR CONTENT		methode	limite/base	actuel	passé1	passé2
Soufre	ppm	ASTM D5185(m)	250	<b>18</b>	22	---






DISTILLATION		methode	limite/base	actuel	passé1	passé2
Point d'ébullition initial	°C	ASTM D2887*	165	<b>165</b>	166	---
Point de distillation de 5%	°C	ASTM D2887*		<b>187</b>	186	---
Point de distillation de 10%	°C	ASTM D2887*	201	<b>196</b>	194	---
Point de distillation de 15%	°C	ASTM D2887*		<b>203</b>	201	---
Point de distillation de 20%	°C	ASTM D2887*	216	<b>211</b>	208	---
Point de distillation de 30%	°C	ASTM D2887*	230	<b>225</b>	222	---
Point de distillation de 40%	°C	ASTM D2887*	243	<b>239</b>	236	---
Point de distillation de 50%	°C	ASTM D2887*	255	<b>252</b>	249	---
Point de distillation de 60%	°C	ASTM D2887*	267	<b>267</b>	263	---
Point de distillation de 70%	°C	ASTM D2887*	280	<b>281</b>	276	---
Point de distillation de 80%	°C	ASTM D2887*	295	<b>298</b>	291	---
Point de distillation de 85%	°C	ASTM D2887*		<b>310</b>	302	---
Point de distillation de 90%	°C	ASTM D2887*	310	<b>322</b>	312	---
Point de distillation de 95%	°C	ASTM D2887*		<b>342</b>	332	---
Point d'ébullition final	°C	ASTM D2887*	341	<b>372</b>	357	---

IGNITION QUALITY		methode	limite/base	actuel	passé1	passé2
Densité API		ASTM D1298*	37.7	<b>38</b>	40	---
Indice de cétane		ASTM D4737*	<40.0	<b>49</b>	51	---

CONTAMINANTS		methode	limite/base	actuel	passé1	passé2
Silicium	ppm	ASTM D5185(m)	<1.0	<b>0</b>	0	---
Sodium	ppm	ASTM D5185(m)	<0.1	<b>0</b>	0	---
Potassium	ppm	ASTM D5185(m)	<0.1	<b>&lt;1</b>	0	---
Eau	%	ASTM D6304*	<0.05	<b>0.003</b>	0.002	---
ppm d'eau	ppm	ASTM D6304*	<500	<b>32</b>	22.2	---

PROPRETÉ DU FLUIDE		methode	limite/base	actuel	passé1	passé2
Particules >4µ		ASTM D7647	>2500	<b>1486</b>	▲ 2651	---
Particules >6µ		ASTM D7647	>640	<b>275</b>	381	---
Particules >14µ		ASTM D7647	>80	<b>17</b>	15	---
Particules >21µ		ASTM D7647	>20	<b>4</b>	4	---
Particules >38µ		ASTM D7647	>4	<b>0</b>	1	---
Particules >71µ		ASTM D7647	>3	<b>0</b>	0	---
Propreté de l'huile		ISO 4406 (c)	>18/16/13	<b>18/15/11</b>	▲ 19/16/11	---




# RAPPORT DU CARBURANT

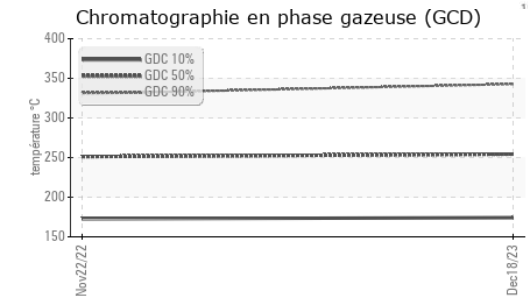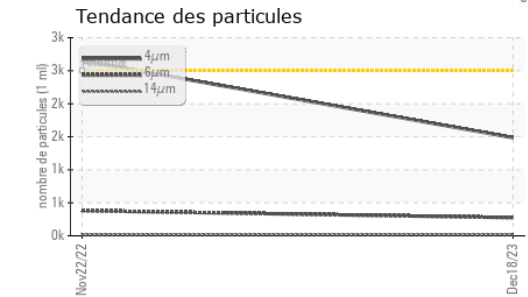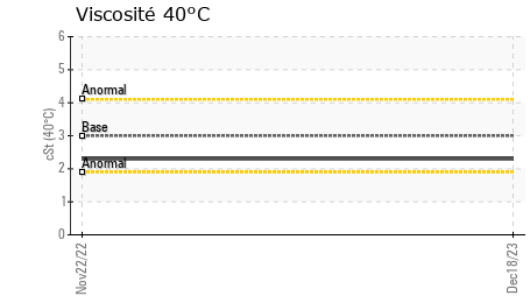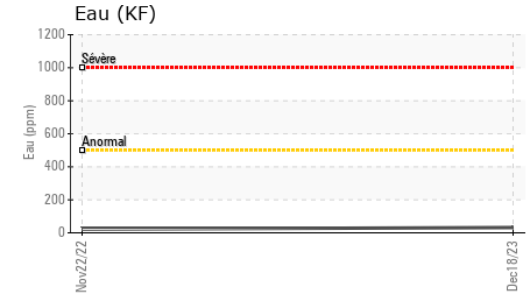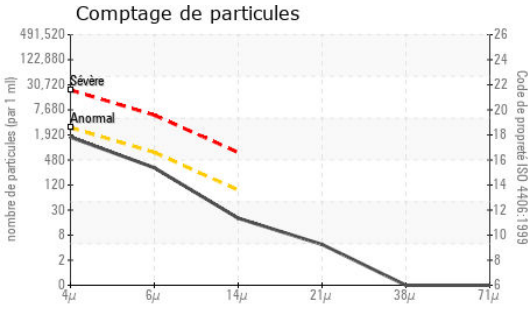

HEAVY METALS	methode	limite/base	actuel	passé1	passé2
Aluminium	ppm	ASTM D5185(m)	<0.1	0	---
Nickel	ppm	ASTM D5185(m)	<0.1	0	---
Plomb	ppm	ASTM D5185(m)	<0.1	<1	---
Vanadium	ppm	ASTM D5185(m)	<0.1	0	---
Fer	ppm	ASTM D5185(m)	<0.1	<1	---
Calcium	ppm	ASTM D5185(m)	<0.1	2	3
Magnésium	ppm	ASTM D5185(m)	<0.1	2	1
Phosphore	ppm	ASTM D5185(m)	<0.1	2	3
Zinc	ppm	ASTM D5185(m)	<0.1	2	3

IMAGES DE L'ÉCHANTILLON	methode	limite/base	actuel	passé1	passé2
Coluer					no image
Fond					no image

## GRAPHIQUES

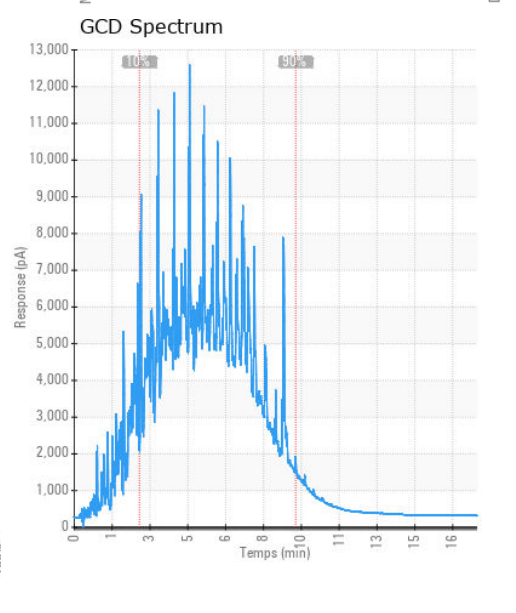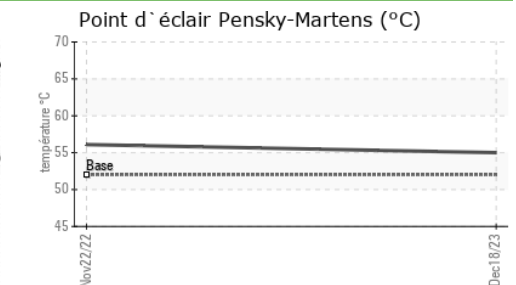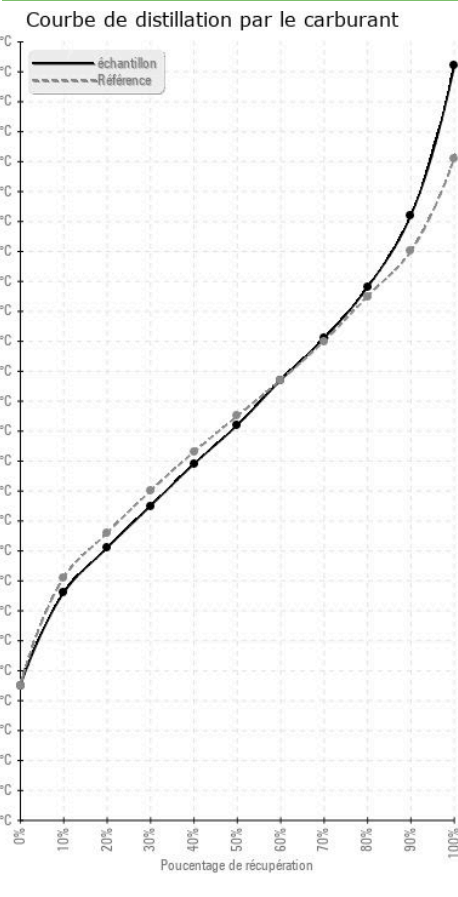

**Laboratoire** : WearCheck - C8-1175 Appleby Line, Burlington, ON L7L 5H9  
**N° d'échantillon** : CU0019834  
**N° de laboratoire** : 02604531  
**Numéro unique** : 5697616  
**Analyse** : FUEL ( Additional Tests: CC Flash, GC-PercFuel, PrtCount )

**CUMMINS EASTERN CANADA LP**  
 3189 SWANSEA CRESCENT  
 OTTAWA, ON  
 CA K1G 3W5  
 Contact: Cindy Harrison  
 cindy.harrison@cummins.com  
 T: (613)736-1146  
 F: x:

Pour discuter ce rapport, contacter le service à la clientèle au 1-800-268-2131.  
 Test denoted (\*) outside scope of accreditation, (m) method modified, (e) tested at external lab.  
 La validez de los resultados y la interpretación se basan en la muestra y la información proporcionada.